
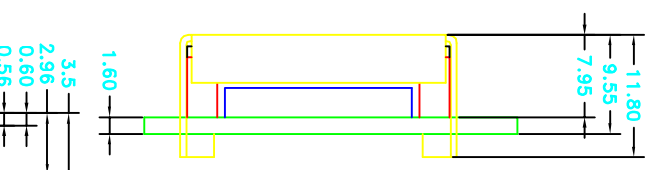


已明以此版本的所有图纸  
 签名: \_\_\_\_\_ 日期: \_\_\_\_\_

REV.	DESCRIPTION	DATE
A0	新出图	2011/5/20

由 Autodesk 教育版产品制作

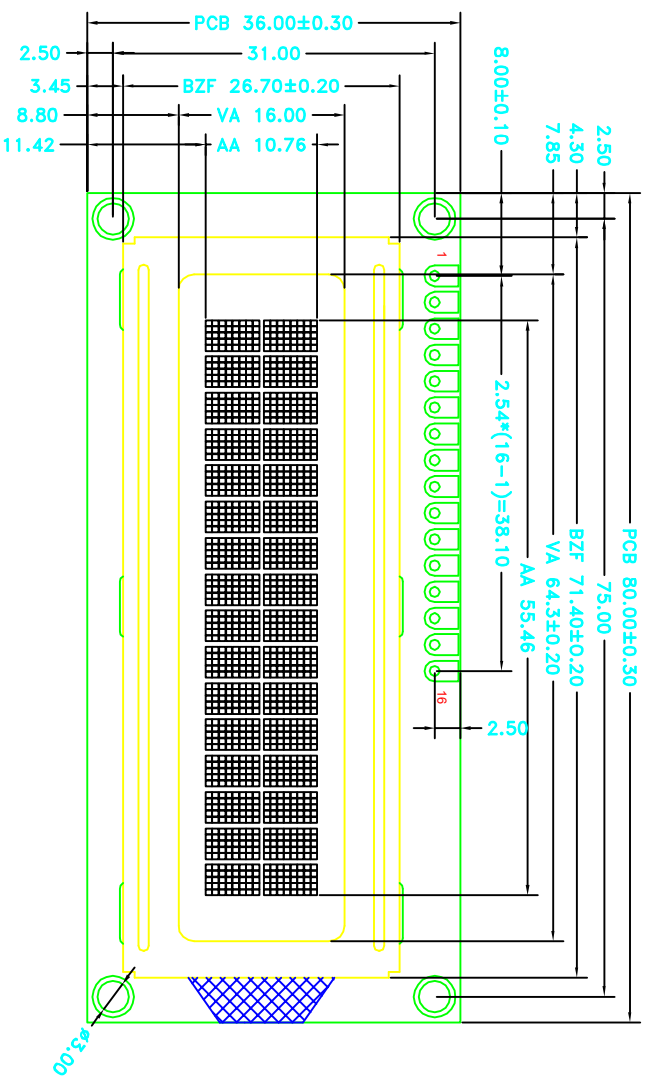

PIN	SYMBOL
1	VSS
2	VDD(5V)
3	V0
4	RS
5	R/W
6	E
7	D0
8	D1
9	D2
10	D3
11	D4
12	D5
13	D6
14	D7
15	BL1(5V)
16	BL2

Specifications:

1. Display Mode: STN/Blue/Transmissive/Negative
2. Viewing Angle: 6 0 clock.
3. Drive Method: 1/16Duty 1/5 Bias, Vop=5.0V, VDD=5.0V
4. Top: -20°C~+70°C, Tst: -25°C~+80°C.
5. Connector: ZEBRA.
6. Backlight: 1X1=1 pcs White LED side Backlight. If=20mA & Vf=5.0±0.2V. X=0.260~0.30, Y=0.260~0.30.
7. Drive IC: SPLC780D1-001A-C, SPLC100B1-C
8. RoHS Compliant: Yes.
9. With " \* " Mark Dimensions Are Important Dimensions.

LUMMAX ELECTRONICS CO., LTD

GENERAL TOL. ±0.20	ALL UNITS mm	DATE	MODEL NUMBER:	PROJECTION	SHEET: 1 OF 1
DWN: luojinwei		2011/5/20	1602C-NTUSM-R(蓝绿白光)		DATE: 2011/5/20
CHK:			DO NOT SCALE THIS DRAWING.		

由 Autodesk 教育版产品制作