

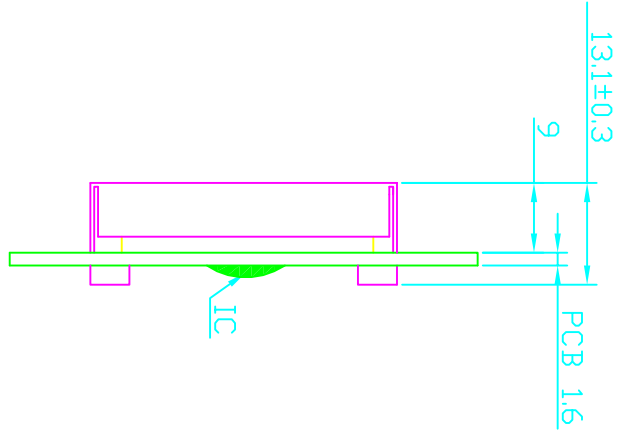


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

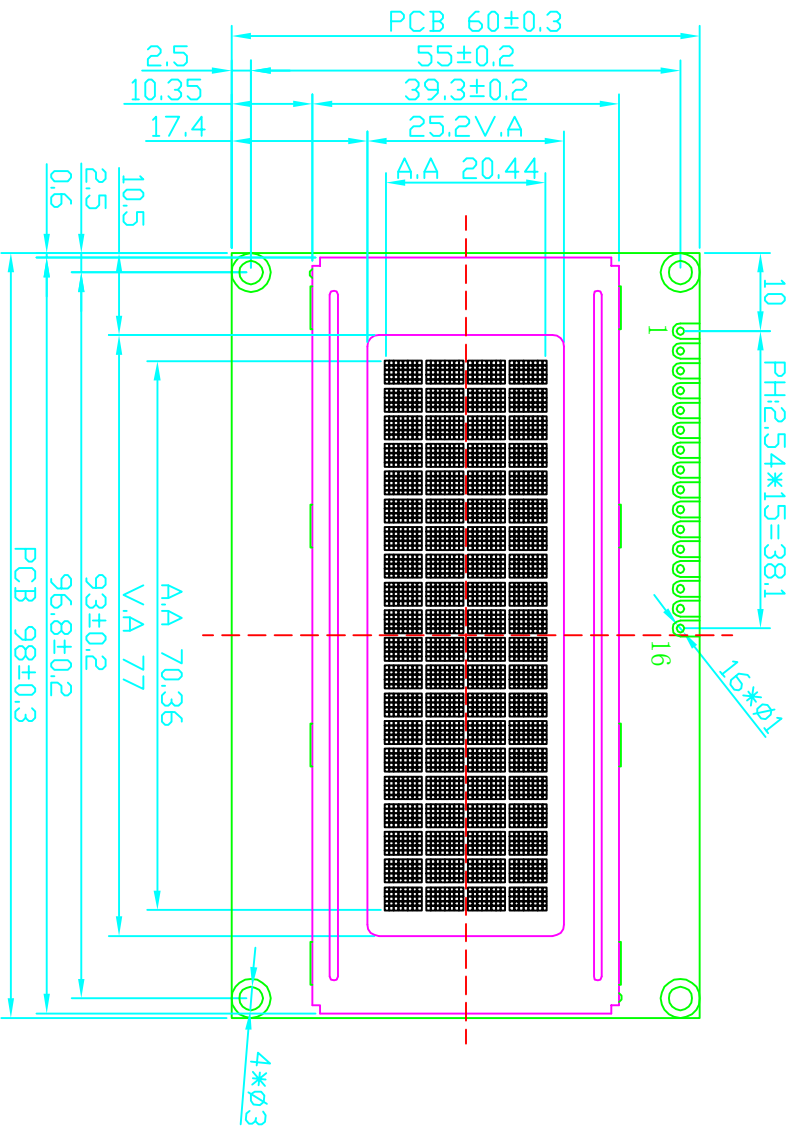

DOT SIZE:

- SPECIFICATION:
- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
  - 2). DUTY: 1/16. BIAS: 1/5. VOP=4. 2V
  - 3). VIEWING ANGLE: 6 0' CLOCK
  - 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
  - 5). BACKLIGHT: WHITE I=40MA
  - 6). DRIVE POWER: VDD=5. 0V

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-8-4

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ		2011/8/4	2004A-B	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/8/4

DO NOT SCALE THIS DRAWING.