


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2012-10-20

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

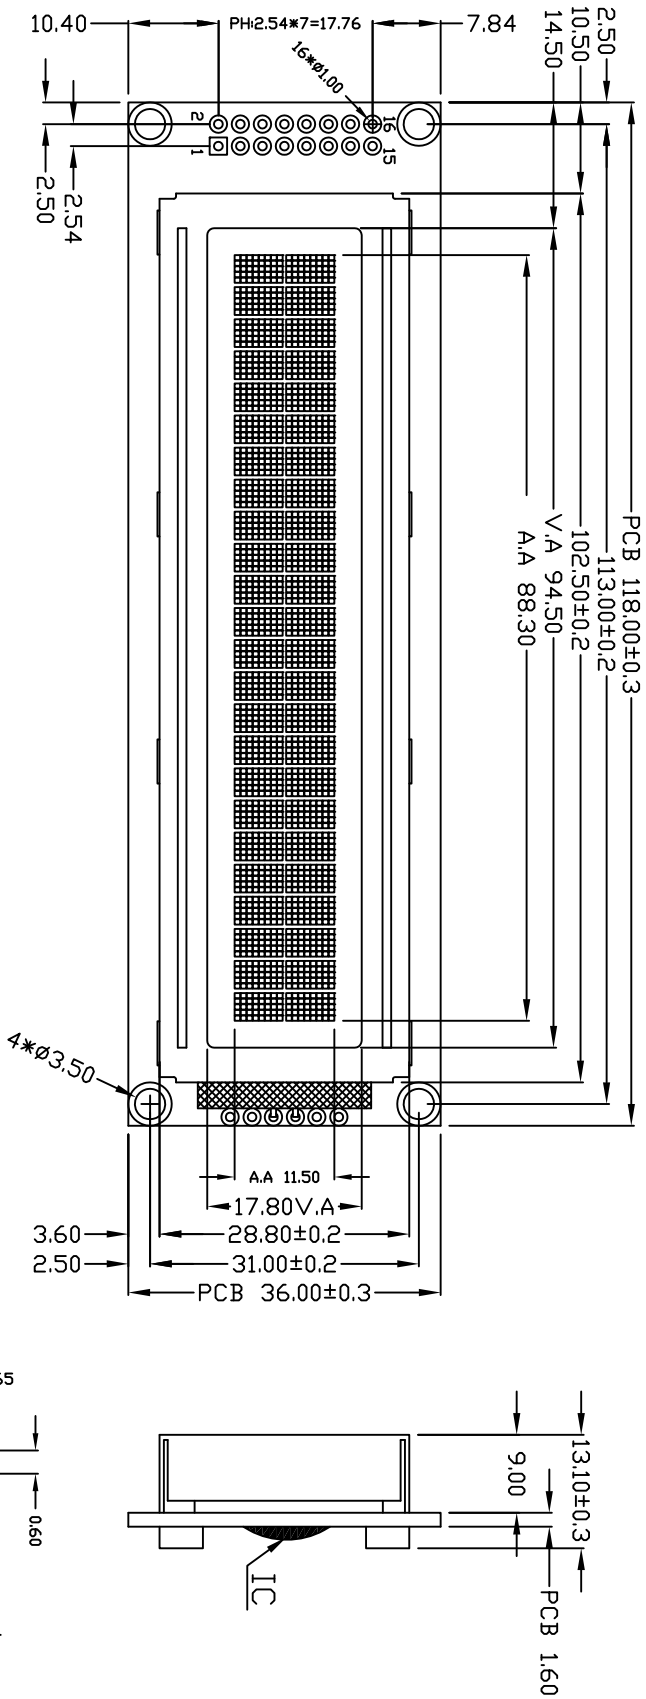

SPECIFICATION:

- 1). STN(Y-G) / POSITIVE/TRANSFLECTIVE
- 2). DUTY:1/16. BIAS:1/5. VOP=4.7V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: Y-G I=40MA
- 6). DRIVE POWER: VDD=5.0V

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ		2012/10/20	HSM2402A-Y	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:				DO NOT SCALE THIS DRAWING.	2012/10/20
			PROJECTION		