

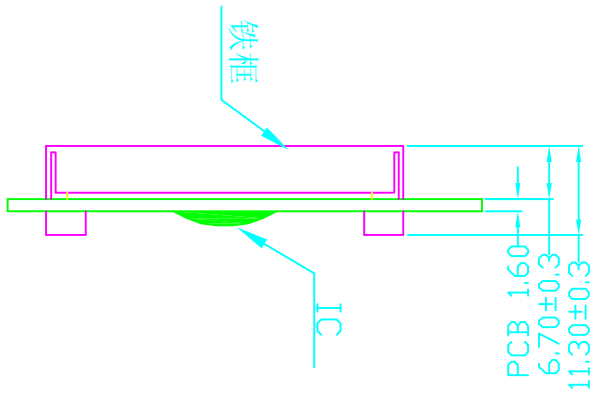


INTERFACE	
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	RS
12	V0
13	VDD(5V)
14	VSS
15	CSA
16	CSB
17	VEE
18	RST
19	LEDA(5V)
20	LED-K

SPECIFICATION:

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/64. BIAS:1/9. VOP=12.5V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA

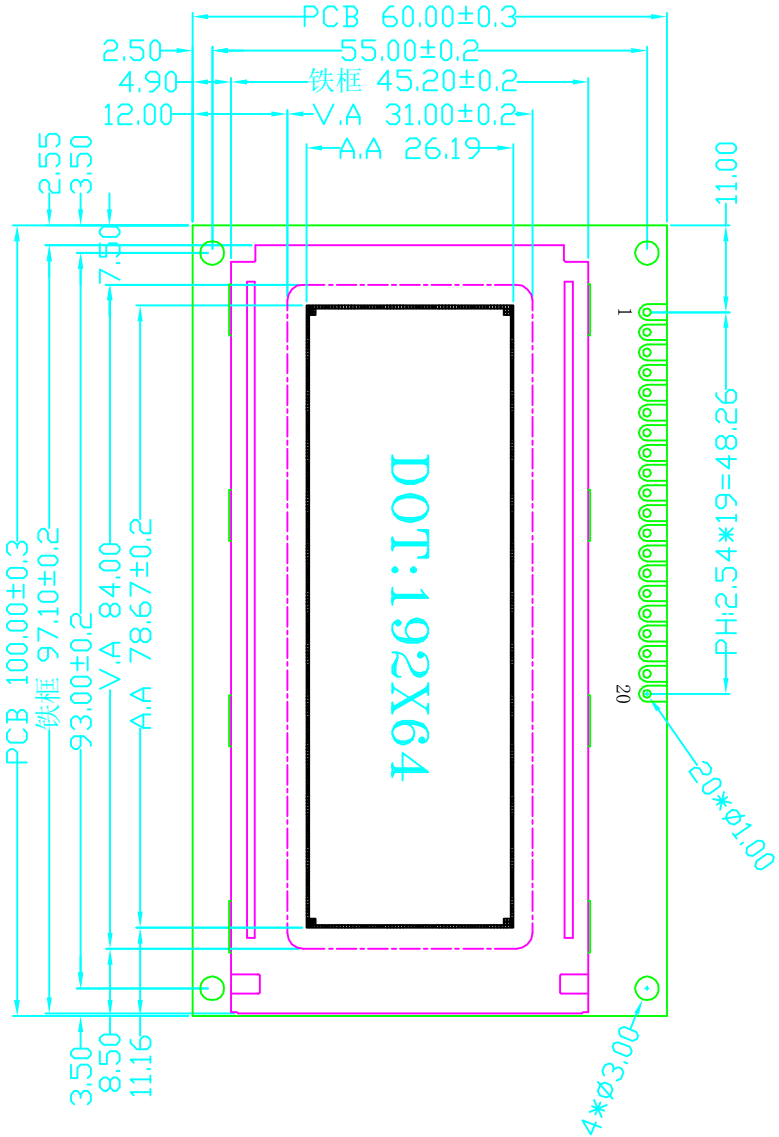

DOT SIZE:

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-11-12

LUMMAX ELECTRONICS CO., LTD			
Unspecified Tolerance:	±0.20	UNITS: mm	DATE:
DESIGN BY:	WZQ	2011/11/12	MODE NUMBER:
CHECKED BY:			19264T-B
CUSTOM NO.:			PROJECTION
			SHEET:
			1 OF 1
			DATE:
			2011/11/12