





INTERFACE	
1	VDD(3.3V)
2	VSS
3	/CS
4	RS
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/RST
16	BLA(3.3V)

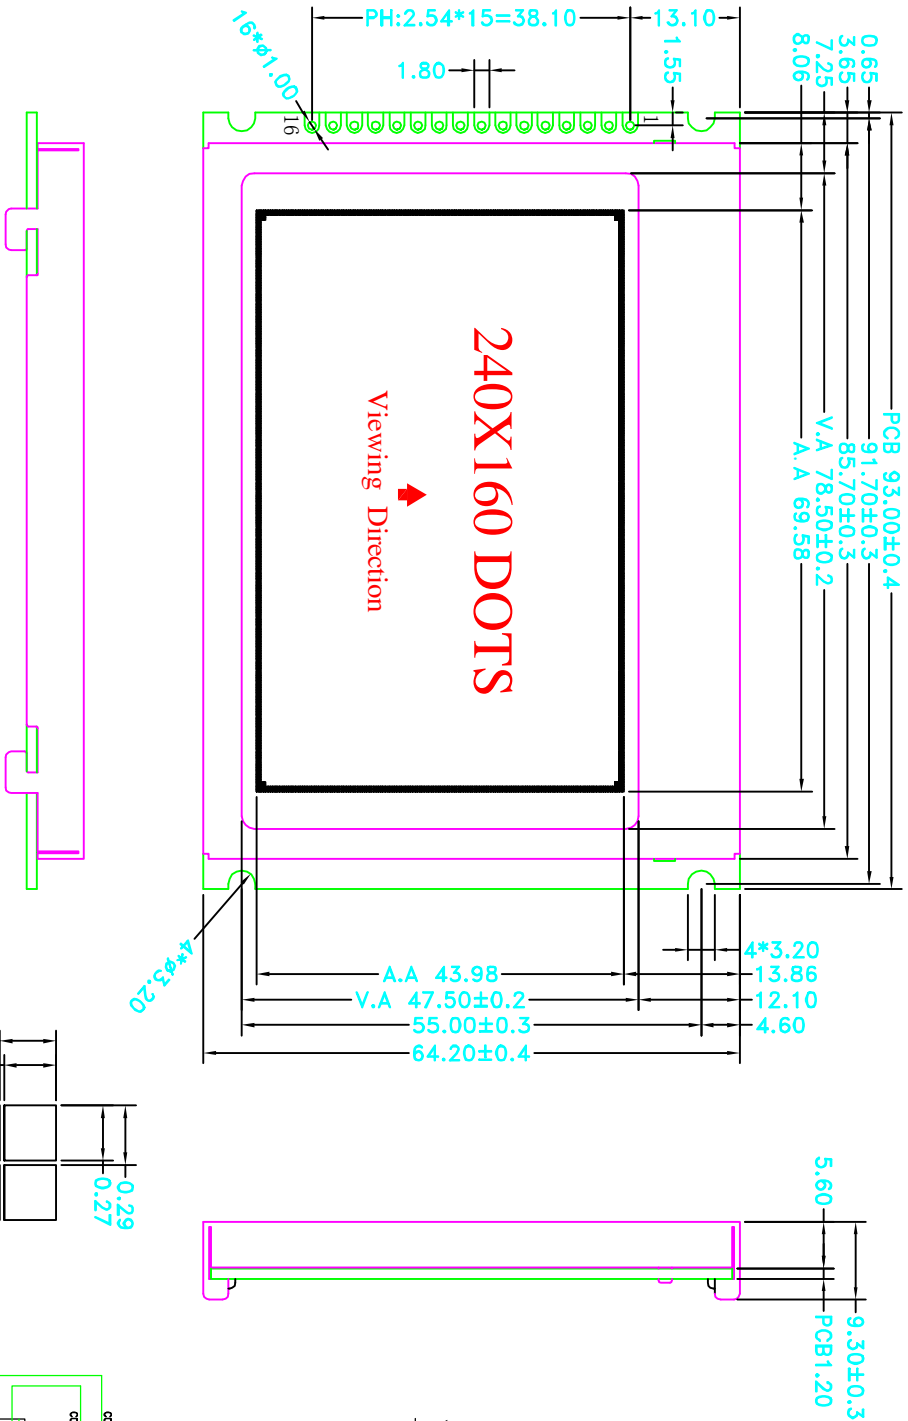

DOTS SIDE

COM & SEG LAYOUT

- NOTES:
- DISPLAY TYPE: FSTN, Transflective, Positive
 - OPERATING VOLTAGE: VDD=3.3V
 - OPERATING TEMPERATURE: -20°C~+70°C
 - STORAGE TEMPERATURE: -30°C~+80°C
 - DRIVE MODE: 1/160DUTY, 1/12BIAS
 - VIEWING DIRECTION: 6:00
 - DRIVE IC: ST7586S
 - CONNECTOR: COG+FPIC
 - BACKLIGHT: LED(WHITE,IF=100MA)

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2013/7/31

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	+0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:
DESIGN BY:	WZQ		2013/7/31	240160-00		1 OF 1
CHECKED BY:						DATE:
CUSTOM NO.:						2013/7/31