


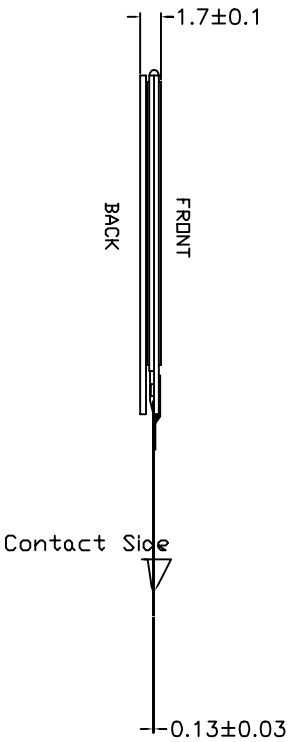


SYM	REV	DESCRIPTION	DATE
01	First issue		Oct-23-2015

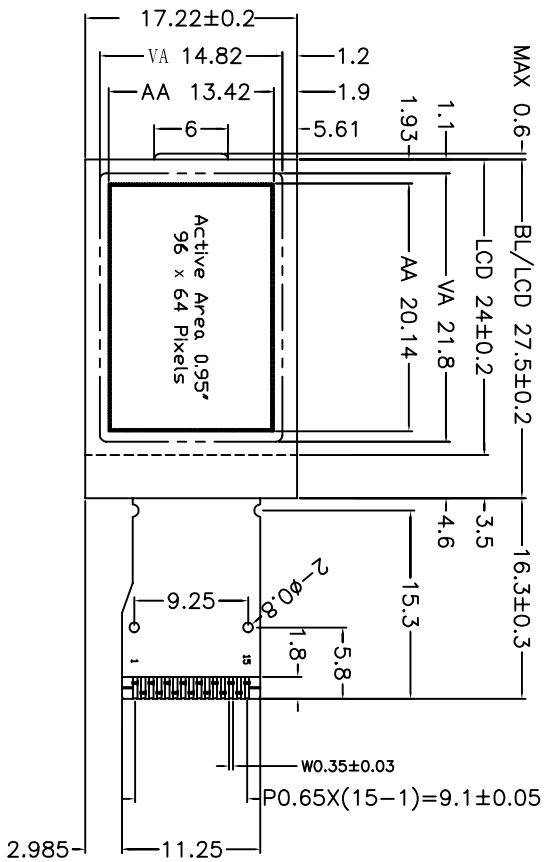


Pin	Symbol	Description
15	NC	
14	NC	
13	BL-	背光源极
12	BL+	背光源极
11	XV0	
10	V0	1uF/16V
9	VSS	电源地
8	VDD28	工作电压
7	VDD18	IO口电压
6	SDIN	串行数据
5	SCLK	串行时钟
4	D/C#	数据/指令选择
3	RES#	复位
2	CS#	芯片选择
1	NC	

4线SPI接口



scale:10:1
detail:A

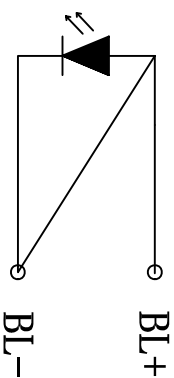

1pc WHITE LED, 3V±0.2V, If=15mA

- NOTES:
1. DISPLAY TYPE: FSTN/NEGATIVE
 2. OPERATING VOLTAGE: VDDI=1.8, VDDA=2.8V
 3. OPERATING TEMPERATURE: -20°C~70°C
 4. STORAGE TEMPERATURE: -30°C~80°C
 5. DRIVE MODE: 1/64D, 1/9B
 6. VIEWING DIRECTION: 6:00
 7. POLARIZER TYPE: TRANSMISSIVE
 8. CONNECTOR: ST7539
 9. CUSTOMER No.:

TITLE:	CD	LUMMAX ELECTRONICS CO.,LTD	
Draw:	WPY	MODEL:	HEM9664-07
CHK:		UNIT:	mm
Appv:		SCALE:	
		GENERAL TOL:	±0.2
		SHEET NO:	1/1