

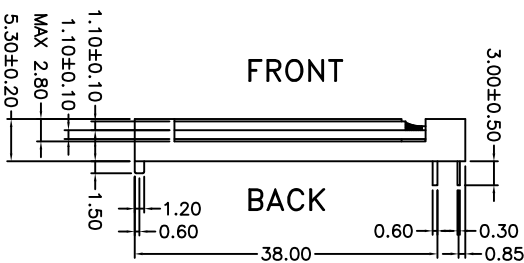
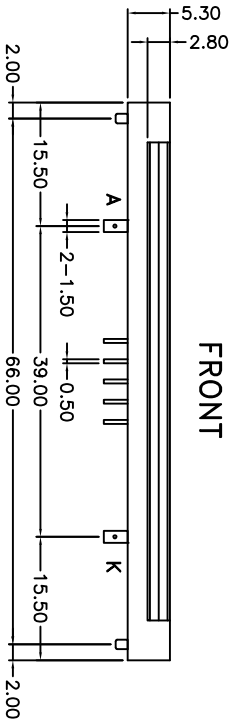


INTERFACE	
1	SDA
2	SCL
3	VLCD
4	VDD
5	VSS

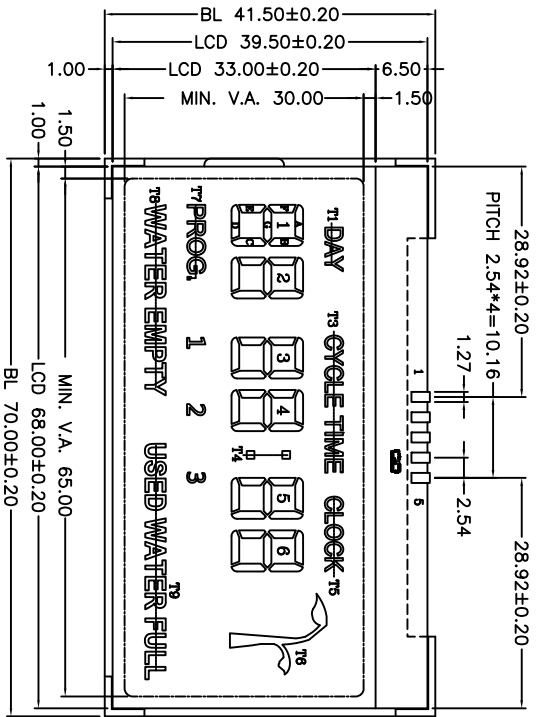

- Specifications:
1. Display Mode: VA/Transmissive/Negative.
  2. Viewing Angle: 12 0'clock.
  3. Drive Method: 1/4 Duty 1/3 Bias, Vop=3.3V, VDD=3.3V (A2)
  4. Top: 0°C~+50°C, Tst: -10°C~+60°C.
  5. Connector: COG+PIN.
  6. Backlight: 4PCS WHITE LEDS, IF=60mA & VF=3.3±0.1V
  7. Drive IC: HT16C22G
  8. RoHS Compliant: Yes.
  9. With \* Mark Dimensions Are Important Dimensions.

VER	DETAIL DESCRIPTION	DATE
A0	FIRST ISSUE	2016/05/09
A1	改结构	2016/05/17
A2	改电压为3.3V	2016/05/25

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION:	SHEET:
DESIGN BY:		LIW	2016/05/25	HEG8853-00-NTUSW-R-A2		1 OF 3
CHECKED BY:						DATE:
CUSTOM NO.:				DO NOT SCALE THIS DRAWING.		2016/05/25