


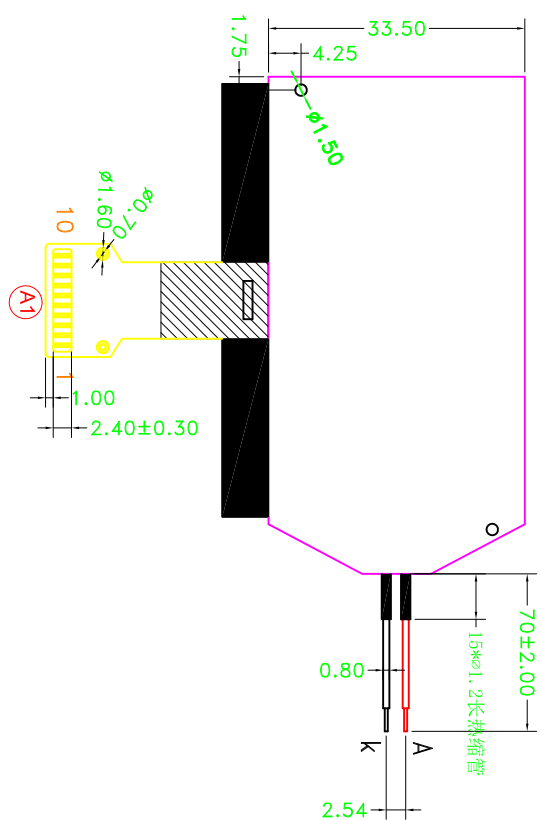
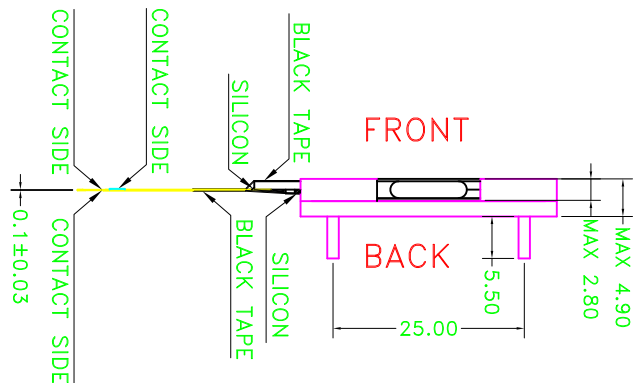


Signature: \_\_\_\_\_

Date: \_\_\_\_\_

A0	新出图	luojinwei	2012.4.14
A1	改FPC为镂空的	luojinwei	2012.6.12

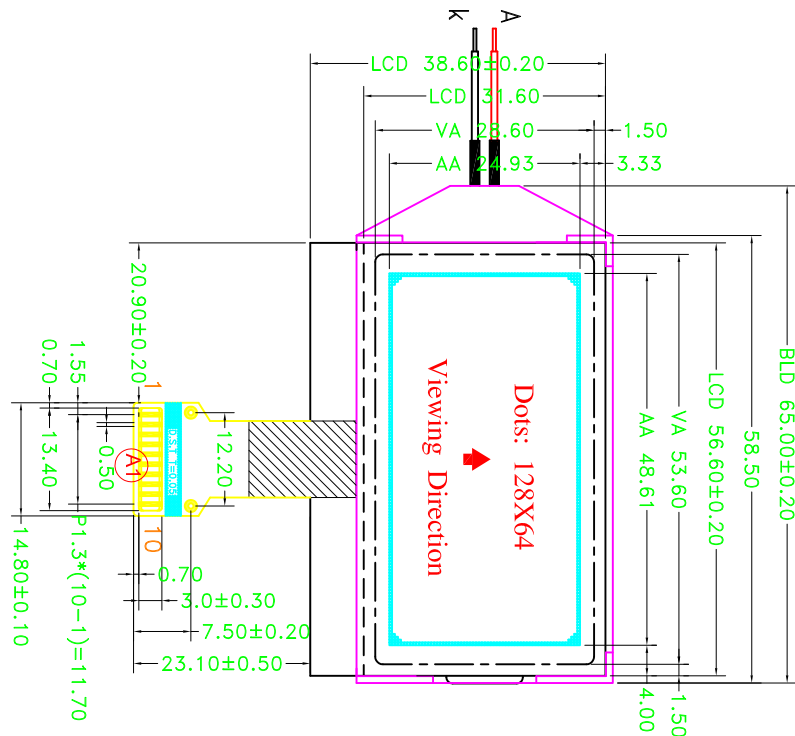

PIN	SYMBOL
1	CS1B
2	/RES
3	A0
4	D6(SCLK)
5	D7(SDA)
6	VDD
7	VSS
8	V0
9	XV0
10	VG

# LUMMAX ELECTRONICS CO.,LTD

- Specifications:
1. Display Mode: STN Yellow-Green, Transmissive/Positive.
  2. Viewing Angle: 6 0'clock.
  3. Drive Method: 1/64 Duty 1/7 Bias, Vop = 8.2V, Vdd = 2.8V.
  4. Top: -10°C~+60°C, Tst: -20°C~+70°C.
  5. Connector: COG+FPC.
  7. Drive IC: ST7567(or other compatible IC)
  8. Backlight: 1 PCS Green LED Backlight, If=20mA & Vf=3.0±0.1V  
Wavelength: 515-525nm, Luminance: Min 100 cd/m2, Uniformity: 70%
  9. RoHS Compliant: Yes.
  10. With \* Mark Dimensions Are Important Dimensions.

Unspecified Tolerance: ±0.20	UNITS: mm	DATE: 2012.4.14	MODEL NUMBER: HSG12864-34-YTDSG-R-A1	PROJECTION	SHEET: 1 OF 1
DESIGN BY: luojinwei	CHECKED BY:	DATE:	DO NOT SCALE THIS DRAWING.	DATE: 2012.3.27	