




SYM	REV	DESCRIPTION	DATE
	01	First issue	Mar-12-2015
	02	修改FPC, 改焊接变直插	Apr-11-2015

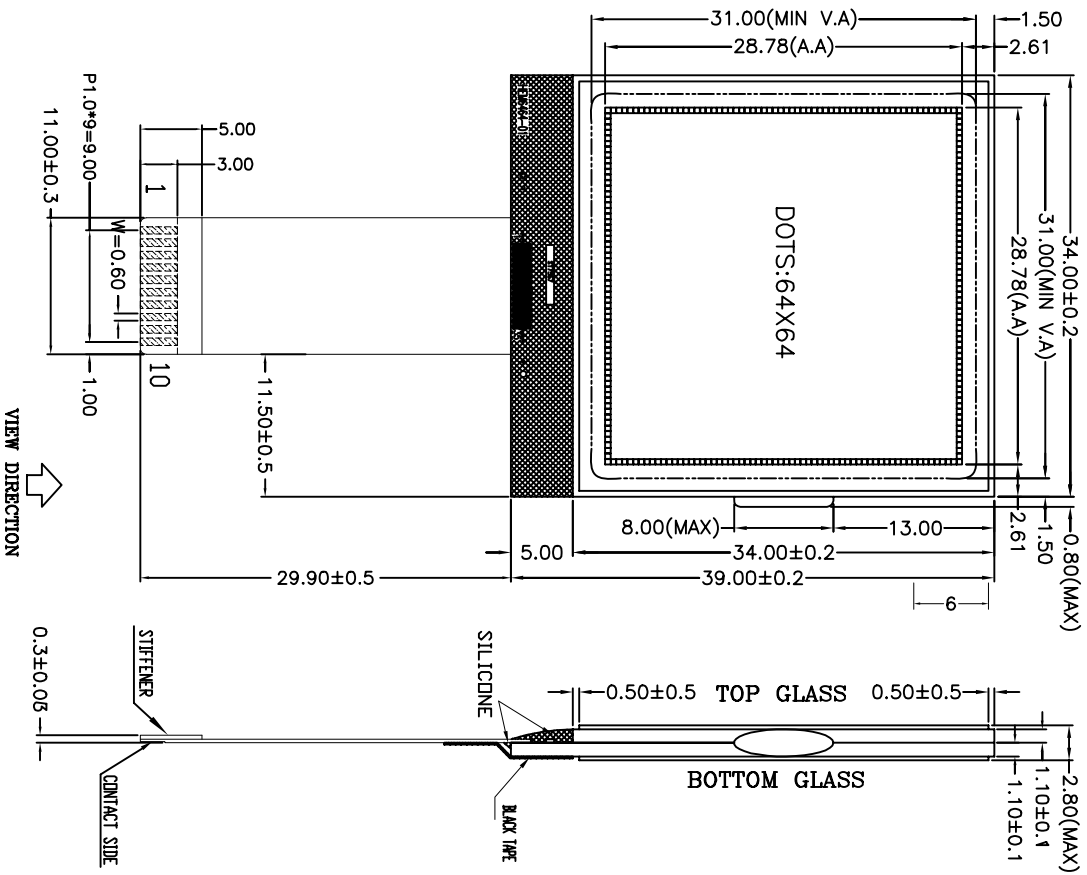

FPC PIN ASSIGNMENT:

PIN	SYMBOL
1	VG
2	XV0
3	V0
4	VSS
5	VDD
6	SDA
7	SCLK
8	AO
9	REST
10	CS

- NOTES:
1. DISPLAY TYPE: FSTN/POSITIVE
 2. OPERATING VOLTAGE: 9.0V VDD:3.3V
 3. DRIVE MODE: 1/65D,1/9B
 4. VIEWING DIRECTION: 6:00
 5. POLARIZER TYPE: REFLECTIVE
 6. OPERATING TEMPERATURE: -20°C~70°C
 7. STORAGE TEMPERATURE: -50°C~80°C
 8. CONNECTOR: COG/ST7567
 9. CUSTOMER No.:

TITLE:	CD	LUMMAX ELECTRONICS CO.,LIMITED	
Draw:	WPY	MODEL:	HEM6464-01D
Chk:		UNIT:	mm
App:		SCALE:	
		DWG NO:	LF-02
		GENERAL TOL:	±0.2
		SHEET NO:	1/1