


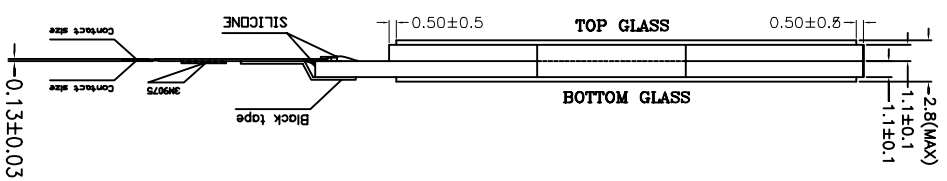


SYM	REV	DESCRIPTION	DATE
	01	First issue	May-06-2014
	02	接口改到和HEMI2864-201一样	May-12-2014
	03	改fstn	Jun-19-2014
	04	psc上加双面胶	Aug-26-2014

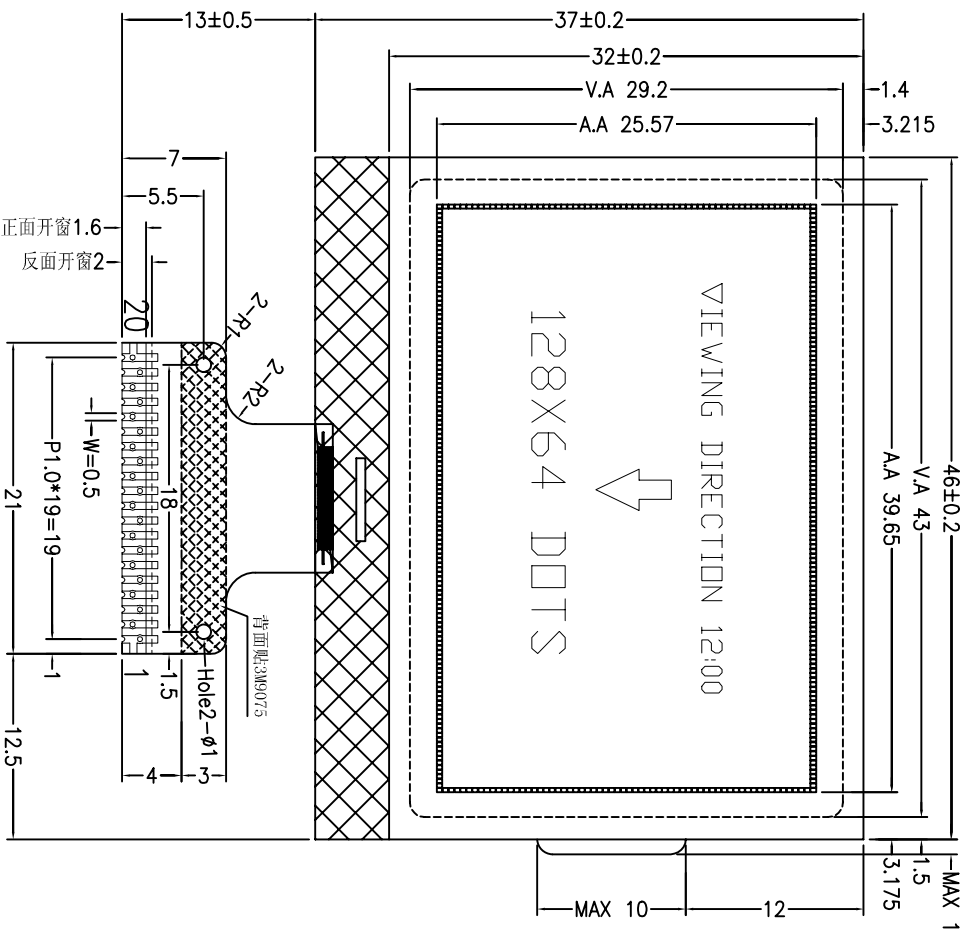

PIN	SYMBOL	1uF/16V
1	CS1B	
2	/RES	
3	A0	
4	/WR	
5	/RD	
6	D0	
7	D1	
8	D2	
9	D3	
10	D4	
11	D5	
12	D6	
13	D7	
14	VDD	
15	VSS	
16	V0	
17	XV0	
18	VG	
19	C86	1uF
20	P/S	

SCALE: 10:1

- NOTES:
1. DISPLAY TYPE: FSTN/POSITIVE
  2. OPERATING VOLTAGE: VDD=3.3V, Vlcd=9.0V
  3. OPERATING TEMPERATURE: -10°C~60°C
  4. STORAGE TEMPERATURE: -20°C~70°C
  5. DRIVE MODE: 1/64D,1/9B
  6. VIEWING DIRECTION: 12:00
  7. POLARIZER TYPE: REFLECTIVE
  8. CONNECTOR: COG/ST7567
  9. CUSTOMER No.:

TITLE:	FOG	LUMMAX ELECTRONICS CO., LIMITED	
Draw:	XQC	MODEL:	HEMI2864-201B
CHK:		UNIT:	mm
Appv:		SCALE:	
		DWG NO: LF-04	
		GENERAL TOL: ±0.2	
		SHEET NO: 1/1	