


确认此型号所有图纸，签字确认：

4.0  
5.0

2.0  
3.0

修改记录

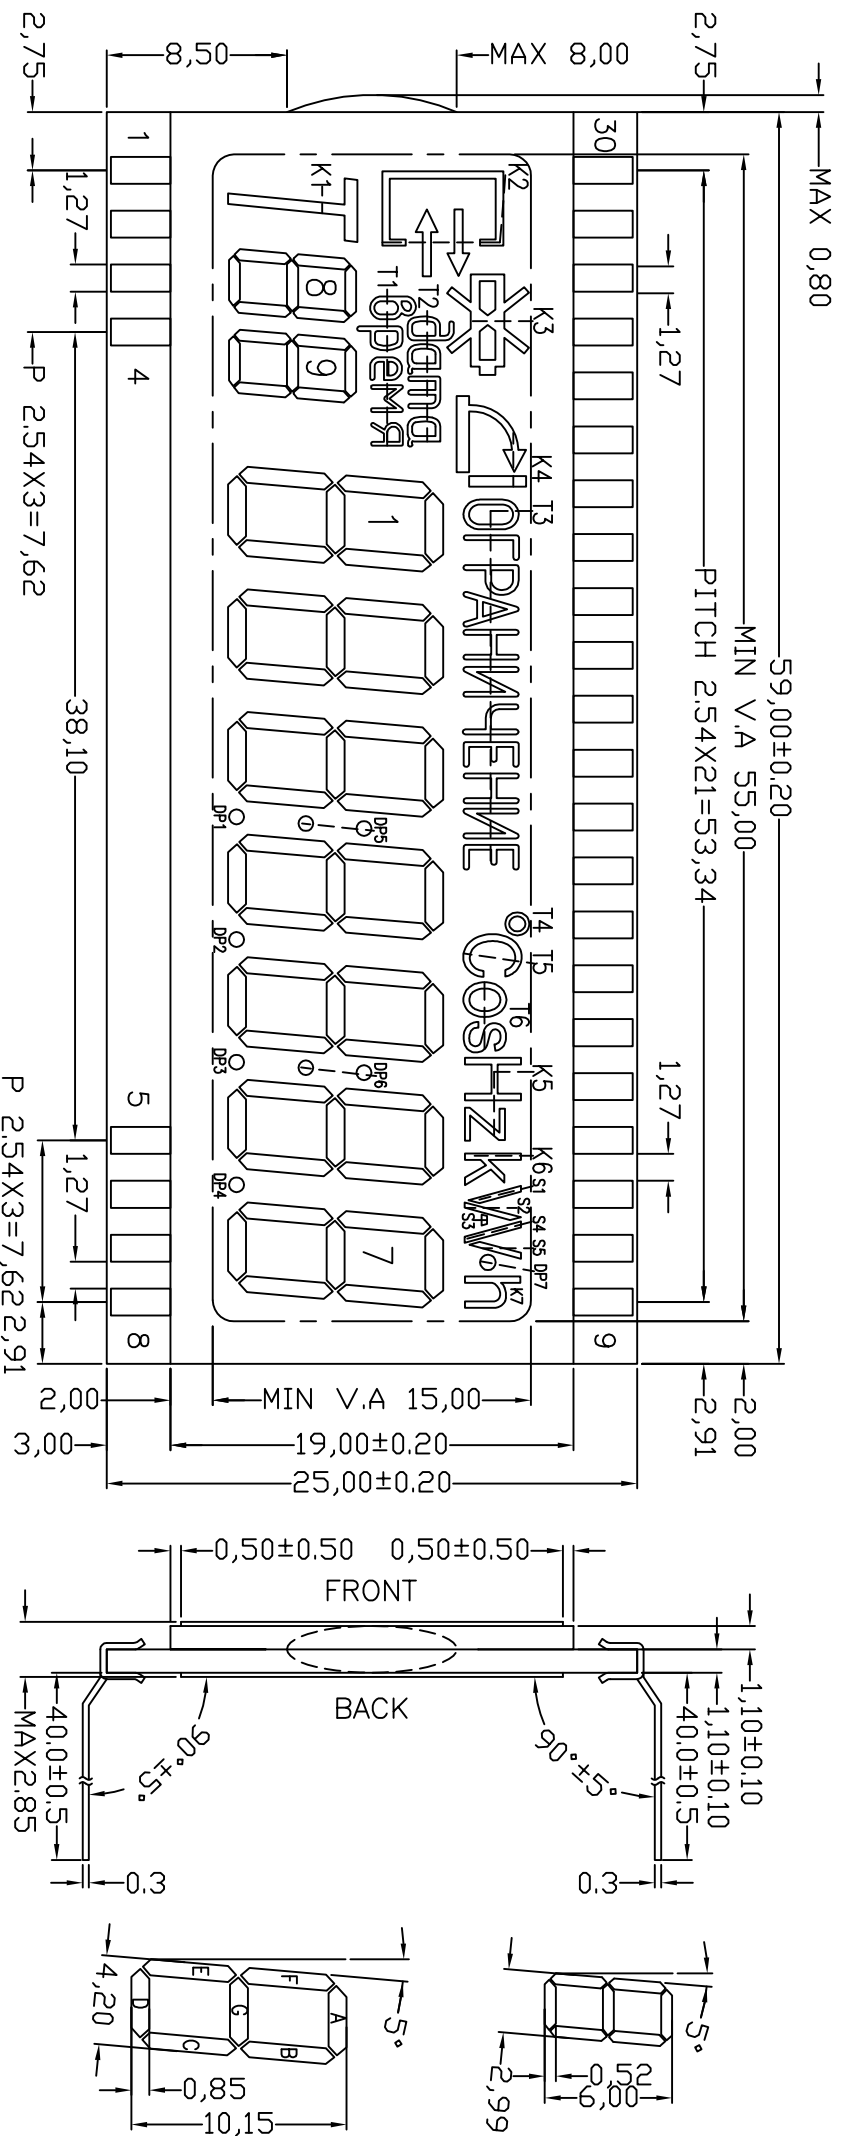

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
COM1	COM1							COM1	S4	K6	DP4	7A	DP6	6A	DP3	5A	DP2	4A	DP5	3A	DP1	2A	T4	1A	T3	T1	9A	K2	8A	K1
COM2		COM2						COM2	S5	S1	T5	7B	7F	6B	6F	5B	5F	4B	4F	3B	3F	2B	2F	1B	1F	T2	9B	9F	8B	8F
COM3			COM3					COM3	DP7	S2	T6	7G	7E	6G	6E	5G	5E	4G	4E	3G	3E	2G	2E	1G	1E	K3	9C	9E	8C	8E
COM4				COM4					K7	S3	K5	7C	7D	6C	6D	5C	5D	4C	4D	3C	3D	2C	2D	1C	1D	K4	9C	9D	8C	8D

NOTES:

HTN

1. DISPLAY TYPE:
2. LCD OPERATING VOLTAGE: 3.3V (推荐)
3. OPERATING TEMPERATURE: -40°C TO +85°C
4. STORAGE TEMPERATURE: -40°C TO +85°C
5. DRIVE MODE: 1/4 DUTY, 1/3 BIAS
6. VIEWING DIRECTION: 6 O'CLOCK
7. POLARIZER TYPE: REFLECTIVE POSITIVE
8. CONNECTOR: PIN
9. CUSTOMER NO.: YDDC42186
10. CUSTOMER CODE: M0021
11. Unspecified tolerance is ±0.2mm

SHEET NO: 1 OF 3


LUMMAX ELECTRONICS CO.,LTD

DRAW: CYY

LCD NO:

CHECKED: ZHOU

GHO4242



APPROVED:

REV 1.0

UNITS: mm

DATE: 2015-08-06