由 Autodesk 教育版产品制作

SYM	REV	DESCRIPTION	DATE
	01	First issue	Nov-24-2014

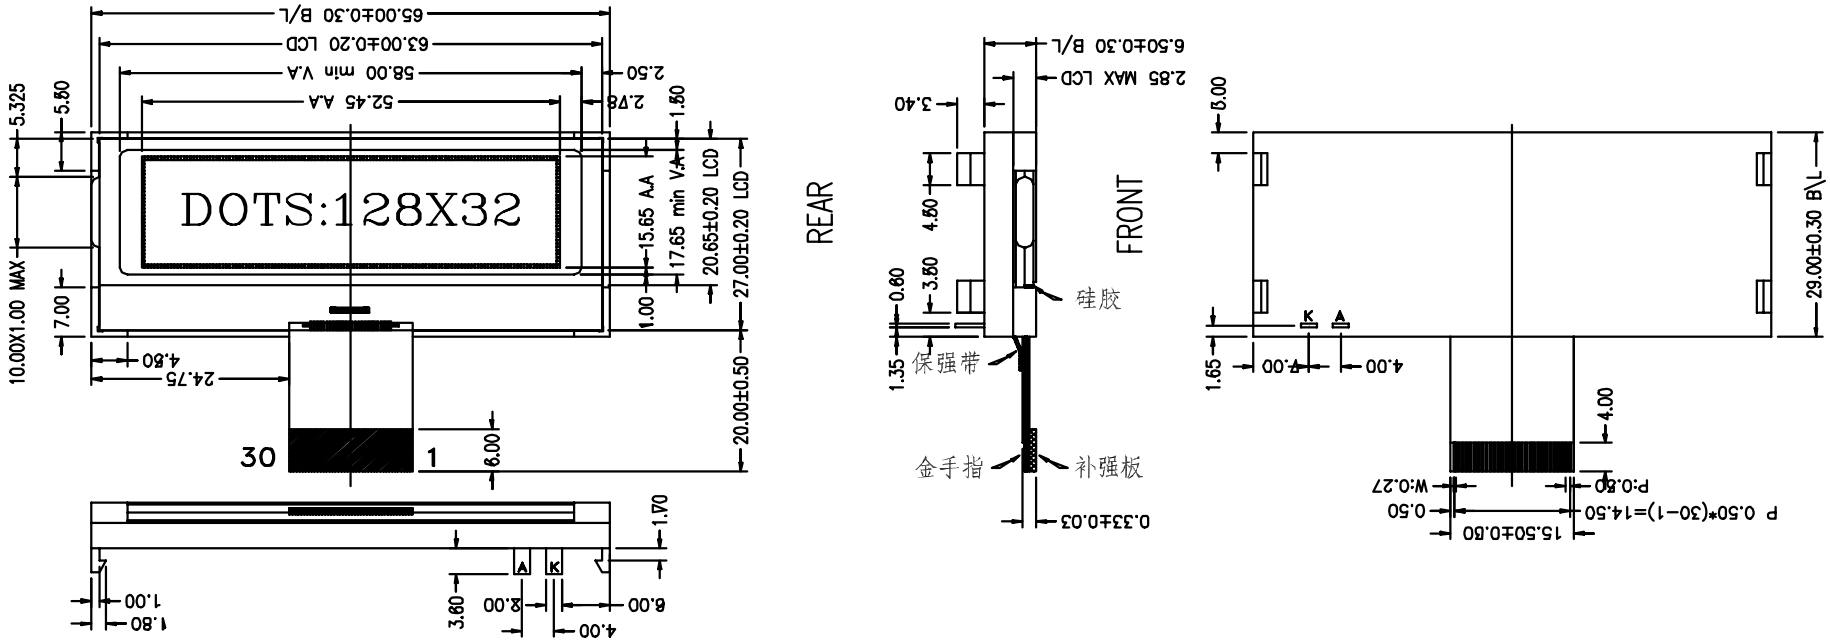



DISPLAY TYPE: STN/Y-G
POLARIZER: TRANSFLECTIVE
VIEWING DIRECTION: 12:00-CLOCK
DRIVE METHOD: 1/33DUTY,1/6BIAS
LCD OPERATING VOLTAGE: 7.5v
LCM OPERATING VOLTAGE: 3.3v
OPERATING TEMP: -20 TO 70 Deg.C
STORAGE TEMP: -25 TO 75 Deg.C
CONNECTOR: COG
UNSIGNED TOLERANCE: ±0.20
BACKLIGHT: Y-G,Vf=4.0±0.2V,If≤30mA

PIN	DESC	PIN	DESC	PIN	DESC	PIN	DESC	PIN	DESC
1	CS1	7	D1	13	D7	19	NC	25	NC
2	RST	8	D2	14	VDD	20	V0	26	VG
3	A0	9	D3	15	VSS	21	XV0	27	NC
4	/WR	10	D4	16	NC	22	NC	28	C86
5	/RD	11	D5	17	NC	23	NC	29	PSB
6	D0	12	D6	18	NC	24	NC	30	NC

TITLE: CD	LUMMAX ELECTRONICS CO.,LIMITED		
Drw: XQC	MODEL: HEM12832-21		DWG NO: C-01
Chk:	UNIT: mm		GENERAL TOL: ±0.2
Apv:	SCALE:		SHEET NO: 1/1

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作