
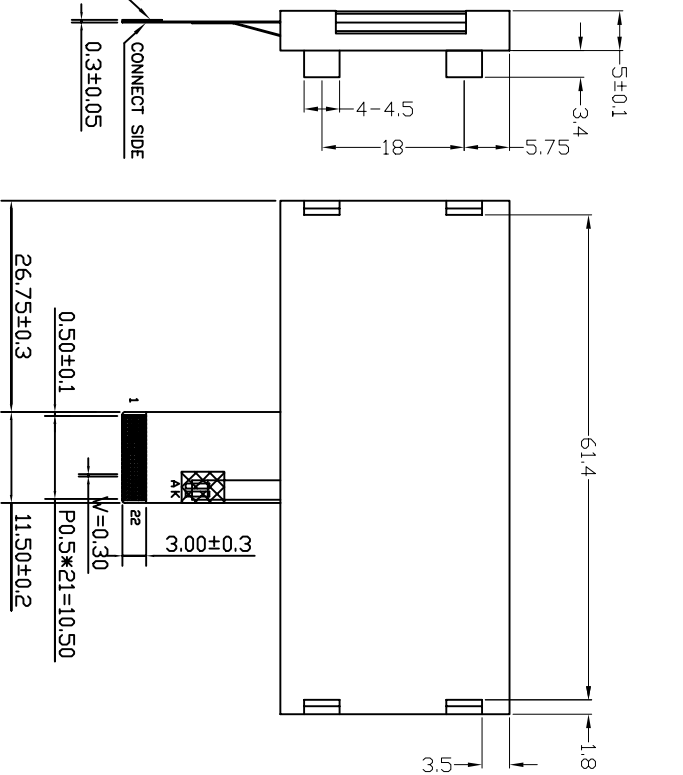





| SYM | REV         | DESCRIPTION | DATE        |
|-----|-------------|-------------|-------------|
| 01  | First issue |             | Mar-09-2016 |

VIEW DIRECTION

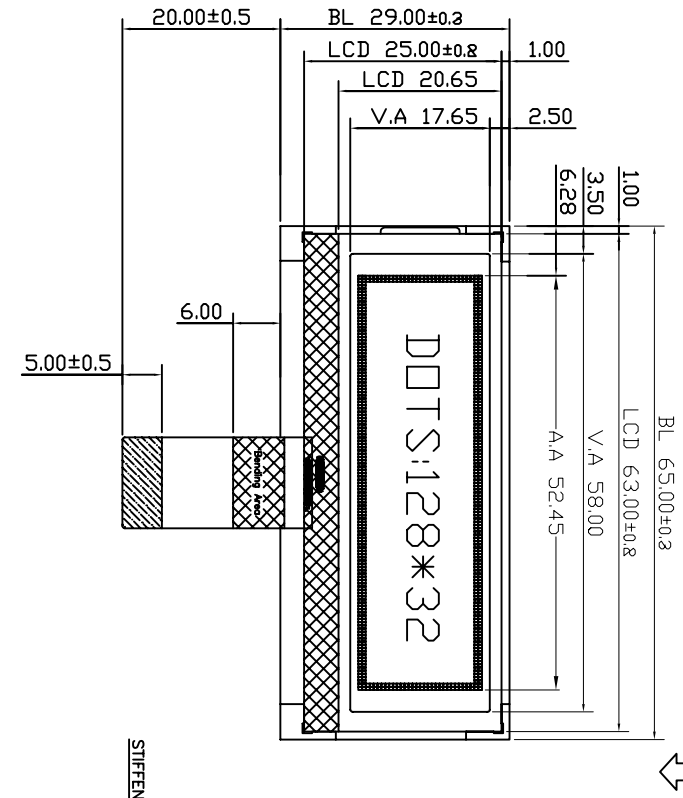

PIN Assignment:

| PIN | NAME | PIN | NAME |
|-----|------|-----|------|
| 1   | /CS  | 16  | V/O  |
| 2   | /RST | 17  | XV0  |
| 3   | A0   | 18  | V/G  |
| 4   | /WR  | 19  | C86  |
| 5   | /RD  | 20  | PSB  |
| 6   | D0   | 21  | A+   |
| 7   | D1   | 22  | K-   |
| 8   | D2   |     |      |
| 9   | D3   |     |      |
| 10  | D4   |     |      |
| 11  | D5   |     |      |
| 12  | D6   |     |      |
| 13  | D7   |     |      |
| 14  | VDD  |     |      |
| 15  | VSS  |     |      |

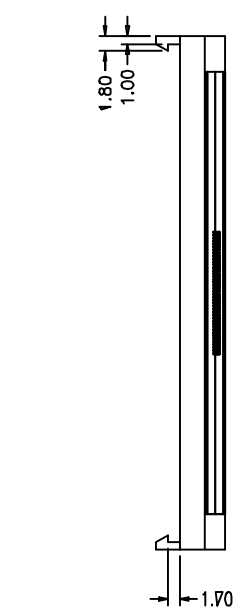

NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: VDD=3.3V, Vlcd=7.5V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/33D, 1/6B
6. VIEWING DIRECTION: 12:00
7. POLARIZER TYPE: TRANSFLECTIVE
8. CONNECTOR: COG/ST7567A
9. CUSTOMER No.:

|        |     |                                 |                      |
|--------|-----|---------------------------------|----------------------|
| TITLE: | CD  | <br>LUMMAX ELECTRONICS CO., LTD | TEL: 86-755-28033960 |
| Draw:  | XQC |                                 | MODEL: HEM12832-21D  |
| Chk:   |     | UNIT: mm                        | GENERAL TOL: ±0.2    |
| App:   |     | SCALE:                          | SHEET NO: 1/1        |