

LUMMAX ELECTRONICS CO., LIMITED

SPECIFICATION

MODULE NO.: T0D96BP-002

Rev: 01

Date: 2017-06-19

APPROVED	CHECKED	PREPARED

Customer Approval:	<input type="checkbox"/> Accept
	<input type="checkbox"/> Reject
	Comment:
	Approved by:

LUMMAX ELECTRONICS CO., LIMITED

CONTENTS

1. GENERAL SPECIFICATIONS(主要特征描述)	P.4
2. EXTERNAL DIMENSIONS(外形尺寸).....	P.5
3. ABSOLUTE MAXIMUM RATINGS(极限参数).....	P.6
4. ELECTRICAL CHARACTERISTICS(模块电气特性).....	P.6
5. BACKLIGHT SPECIFICATION(背光电气特性).....	P.7
6. ELECTRO-OPTICAL CHARACTERISTICS(光电参数).....	P.8
7. INTERFACE DESCRIPTION(接口定义描述).....	P.11
8. TIMING CHARACTERIST (时序特征)	P.13
9. RELIABILITY TEST CONDITIONS(可靠性实验条件)	P.14
10. INSPECTION CRITERION(检查标准).....	P.15
11. PRECAUTIONS FOR USING LCD MODULES(使用注意事项).....	P.19
12. PRIOR CONSULT MATTER (提前商议事项)	P.21

LUMMAX ELECTRONICS CO., LIMITED


1. GENERAL SPECIFICATIONS(主要特征描述)

Item 项目	Contents 内容	Unit 单位
LCD type 液晶显示类型	65K,a-SI, TFT TRANSMISSIVE, NORMAL BLACK	/
Diagonal length 尺寸	0.96	inch
Recommended Viewing Direction 推荐使用方向	ALL	0' Clock
Dot arrangement 点阵	80(R.G.B)*160	Dot
Module size (W*H*T) 模块外围尺寸 (宽*高*厚)	14.04*27.95*1.5	mm
Active area (W*H) 有效显示区域 (宽*高)	10.8*21.7	mm
Backlight Type 背光类型	LED(white 1P LEDS)	/
Drive IC 驱动 IC	ST7735S	/
Interface Type 接口类型	4-SPI	/

LUMMAX ELECTRONICS CO., LIMITED


2. EXTERNAL DIMENSIONS(外形尺寸)

签名: _____	日期: _____	SYM REV	DESCRIPTION	DATE
LUMMAX ELECTRONICS CO., LIMITED		01	First issue	May-24-2018

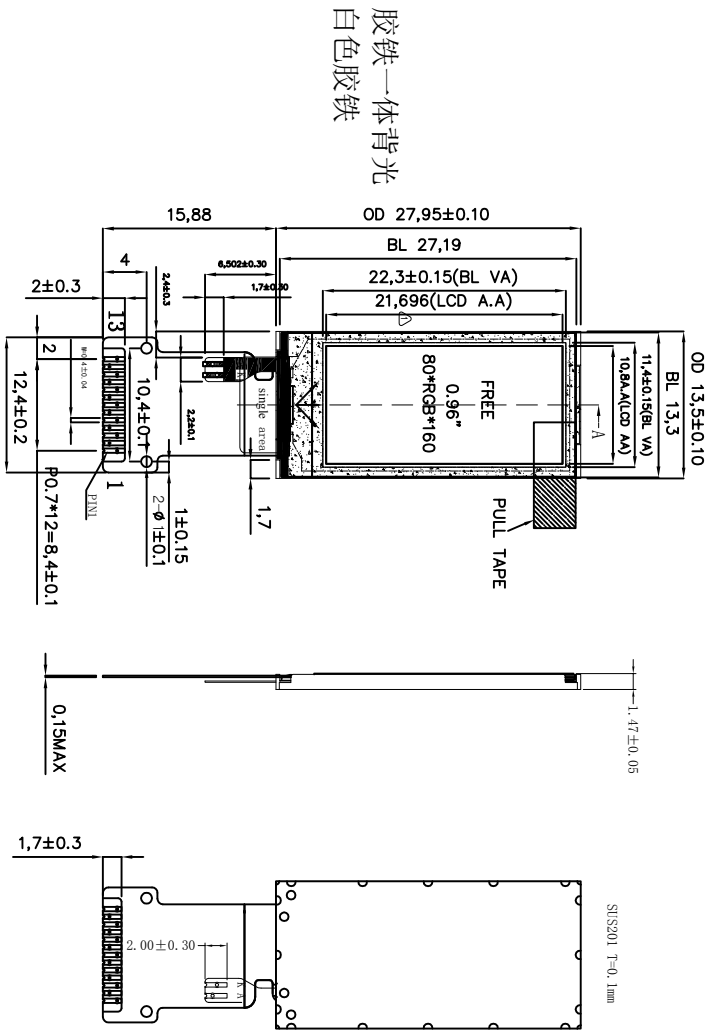

Pin Assignment	
NO.	SYMBOL
1	TP0 (NC)
2	TP1 (NC)
3	SDA
4	SCL
5	RS
6	RES
7	CS
8	GND
9	NC
10	VCC
11	LEDK
12	LEDA
13	GND

- NOTE:
- 1.DISPLAY TYPE:0.96*TFT, TRANSMISSIVE
 - 2.DRIVER IC: ST7735S
 - 3.VIEWING DIRECTION: FREE
 - 4.OPERATING TEMPERATURE:-20°C--+70°C.
 - 5.STORAGE TEMPERATURE:-30°C--+80°C.
 - 6.BACKLIGHT TYPE:1 WHITE LEDS.
 - 7.LED:IF=20.0mA/LED (CONSTANT CURRENT).
 - 8.() REFERENCE DIMENSION.
 9. () TCON MEAN CRITICAL DIM
 - 10.MUST MEET THE REQUIREMENT OF ROHS

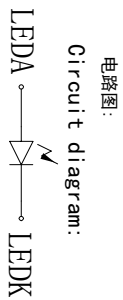

TITLE:	TFT	LUMMAX ELECTRONICS CO., LIMITED	
Draw:	WPY	MODEL:	TOD96BP-002
Check:		UNIT:	mm
App:		SCALE:	
			DWG NO: V01
			GENERAL TOL: ±0.2
			SHEET NO: 1/1

LUMMAX ELECTRONICS CO., LIMITED

3. ABSOLUTE MAXIMUM RATINGS(极限参数)

Item	Symbol	Rating	Unit
Supply voltage	VDD	- 0.3 ~ +4.6	V
Supply voltage (Logic)	VDDI	- 0.3 ~ +4.6	V
Supply voltage (Digital)	VCC	-0.3 ~ +4.6	V
Driver supply voltage	VGH-VGL	-0.3 ~ +30.0	V
Logic input voltage range	VIN	0.3 ~ VDDI + 0.3	V
Logic output voltage range	VO	0.3 ~ VDDI + 0.3	V
Operating temperature range	TOPR	-20 ~ + 70	°C
Storage temperature range	TSTG	-30 ~ +80	°C

4. ELECTRICAL CHARACTERISTICS(模块电气特性)

Parameter	Symbol	Condition	Specification			Unit	Related Pins
			Min	Typ	Max		
Power & operation voltage							
System voltage	VDD	Operating voltage	2.6	2.75	3.3	V	
Interface operation voltage	VDDI	I/O supply voltage	1.65	1.9	3.3	V	
Gate driver high voltage	VGH		10		15	V	
Gate driver low voltage	VGL		-12.4		-7.5	V	
Gate driver supply voltage		VGH-VGL	17.5		27.5	V	
Input / Output							
Logic-high input voltage	VIH		0.7VDDI		VDDI	V	Note 1
Logic-low input voltage	VIL		VSS		0.3VDDI	V	Note 1
Logic-high output voltage	VOH	IOH = -1.0mA	0.8VDDI		VDDI	V	Note 1
Logic-low output voltage	VOL	IOL = +1.0mA	VSS		0.2VDDI	V	Note 1
Logic-high input current	IIH	VIN = VDDI			1	uA	Note 1

LUMMAX ELECTRONICS CO.,LIMITED

Logic-low input current	IIL	VIN = VSS	-1			uA	Note 1
Input leakage current	IIL	IOH = -1.0mA	-0.1		+0.1	uA	Note 1
VCOM voltage							
VCOM high voltage	VCOMH	Ccom=12nF	2.5		5.0	V	
VCOM low voltage	VCOML	Ccom=12nF	-2.4		0.0	V	
VCOM amplitude	VCOMAC	VCOMH-VCOML	4.0		6.0	V	
Source driver							
Source output range	Vsout		0.1		AVDD-0.1	V	
Gamma reference voltage	GVDD		3.0		5.0	V	
Source output settling time	Tr	Below with 99% precision			20	us	Note 2
Output offset voltage	Voffset				35	mV	Note 3

Notes:

1. VDDI=1.65 to 3.3V, VDD=2.6 to 3.3V, AGND=DGND=0V, TA= -30 to 85°C

2. Source channel loading= 2KΩ+12pF/channel, Gate channel loading=5KΩ+40pF/channel.

3. The Max. value is between measured point of source output and gamma setting value.

5. BACKLIGHT SPECIFICATION(背光电气特性)

Item of backlight characteristics 项目	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位	Condition 条件
Forward voltage 正向电压	V _f	2.9	3.2	3.5	V	I _f ≤ 8 mA
BL Luminance 背光亮度	L _v	200	-	260	cd/m ²	
Backlight uniformity 均匀度	No less than 80% (不低于 80%)					
Number of LED LED 数量	-	1			Piece	
Connection mode 连接模式	S/P/M	---			-	

LUMMAX ELECTRONICS CO., LIMITED


6. ELECTRO-OPTICAL CHARACTERISTICS(光电参数)

Ta=25°C, VDD=2.8V, TN LC+ Polarizer

	Item		Symbol	Condition	Specification			Unit
					Min.	Typ.	Max.	
Backlight On (Transmissive Mode)	Luminance on surface($I_f=15\text{mA}$)		L_V	Normally viewing angle $\theta_x = \theta_y = 0^\circ$	300	350	-	cd/m ²
	Contrast ratio		CR		-	600	-	-
	Response time		T_R		-	10	20	ms
			T_F	-	20	30		
	Chromaticity Transmissive	Red	X_R	-	0.614	0.644	0.674	-
			Y_R		0.290	0.320	0.350	-
		Green	X_G		0.270	0.300	0.330	-
			Y_G		0.540	0.570	0.600	-
		Blue	X_B		0.104	0.134	0.164	-
			Y_B		0.097	0.127	0.157	-
		White	X_W		0.267	0.297	0.327	-
			Y_W		0.302	0.332	0.362	-
	Viewing Angle	Horizontal	θ_{x+}	Center CR \geq 10	-	80	-	Deg.
θ_{x-}			-		80	-		
Vertical		θ_{y+}	-		80	-		
		θ_{y-}	-		80	-		
NTSC Ratio(Gamut)		-	-	-	60	-	%	

LUMMAX ELECTRONICS CO., LIMITED


Normally Black Type (Negative)

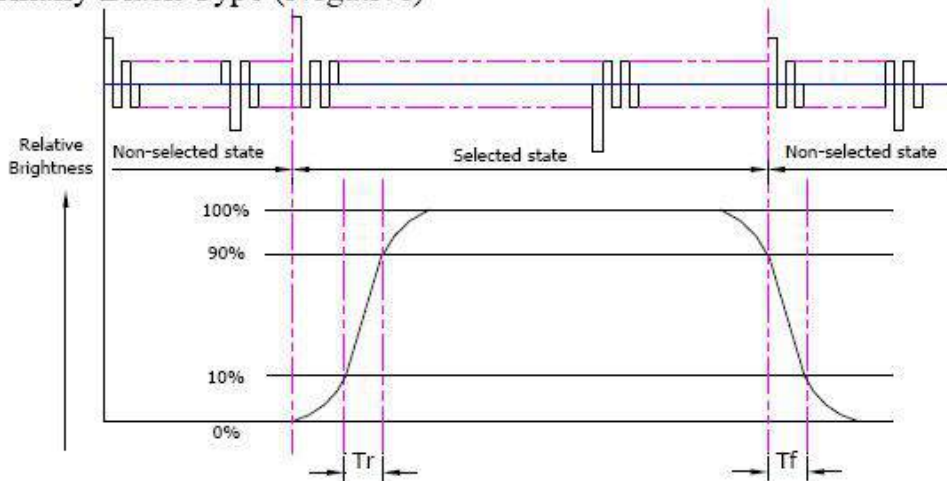

T_r is the time it takes to change from non-selected state with relative luminance 10% to selected state with relative luminance 90%;

T_f is the time it takes to change from selected state with relative luminance 90% to non-selected state with relative luminance 10%.

Normally White Type (Positive)

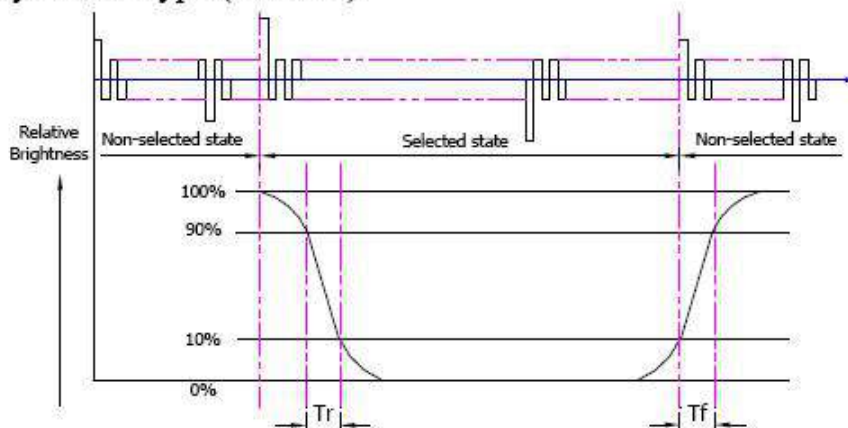

T_r is the time it takes to change from non-selected state with relative luminance 90% to selected state with relative luminance 10%;

T_f is the time it takes to change from selected state with relative luminance 10% to non-selected state with relative luminance 90%;

Definition of Contrast Ratio


Contrast is measured perpendicular to display surface in reflective and transmissive mode. The measurement condition is:

Measuring Equipment	BM-7 or EQUI
Measuring Point Diameter	3mm//1mm
Measuring Point Location	Active Area centre point
Test pattern	A: All Pixels white
	B: All Pixel black
Contrast setting	Maximum

Definitions: CR (Contrast) = Luminance of White Pixel / Luminance of Black Pixel

LUMMAX ELECTRONICS CO.,LIMITED

Definition of Viewing Angles

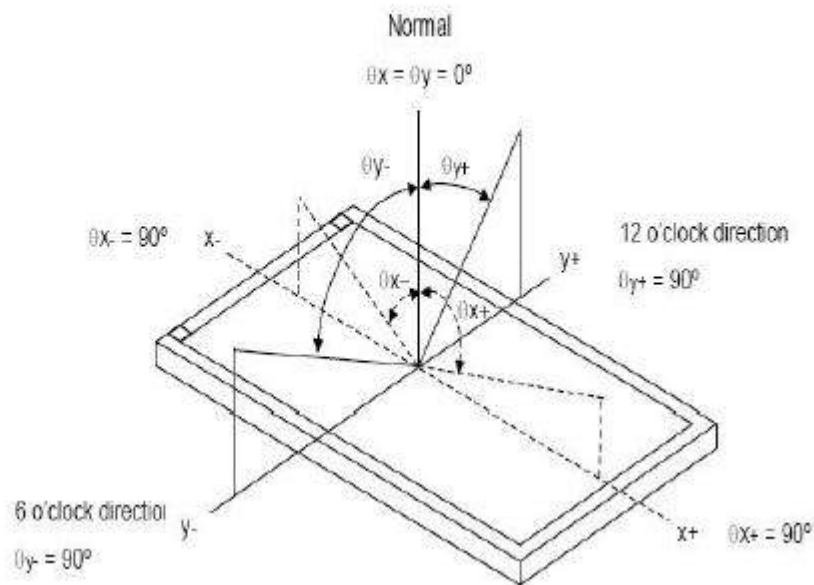


Measuring machine: LCD-5100 or EQUI

Definition of Color Appearance

R,G,B and W are defined by (x, y) on the IE chromaticity diagram

NTSC=area of RGB triangle/area of NTSC triangleX100%

Measuring picture: Red, Green, Blue and White (Measuring machine: BM-7)

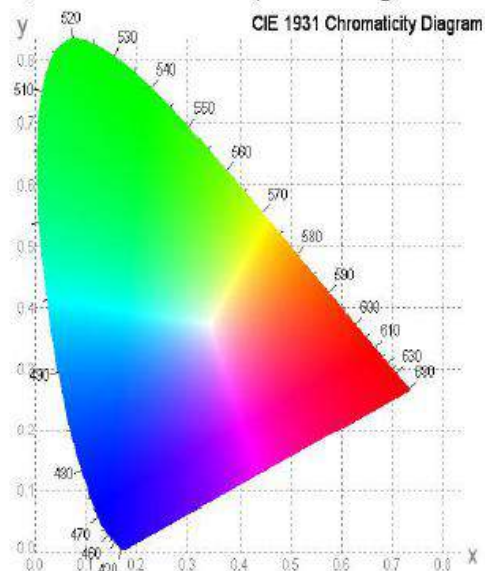

Definition of Surface Luminance, Uniformity and Transmittance

Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.


Surface Luminance: LV = average (LP1:LP9)

Uniformity = Minimal (LP1:LP9) / Maximal (LP1:LP9) * 100%

Transmittance = LV on LCD / LV on Backlight * 100%

Note :Measuring machine:BM-7

LUMMAX ELECTRONICS CO., LIMITED

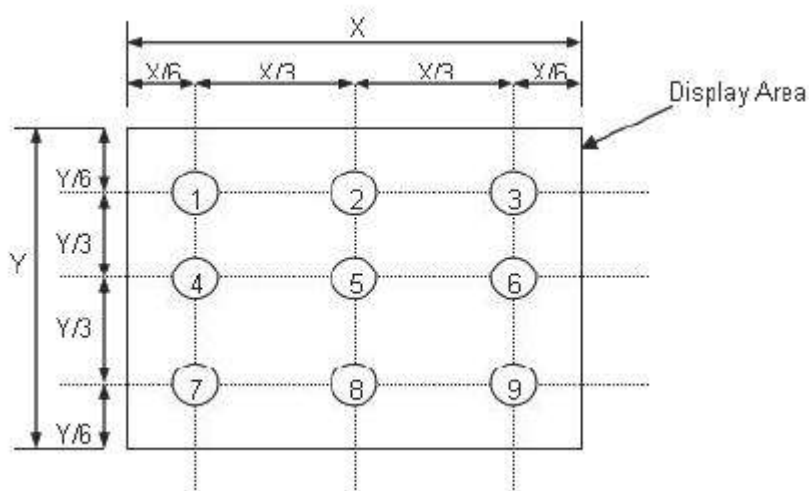


7. INTERFACE DESCRIPTION(接口定义描述)

NO	SYMBOL	FUNCTION
1	NC	No Connect
2	NC	No Connect
3	SDA	SPI interface input/output pin. The data is latched on the rising edge of the SCL signal.
4	SCL	This pin is used to be serial interface clock.
5	RS	Display data/command selection pin in 4-line serial interface.
6	RESET	This signal will reset the device and it must be applied to properly initialize the chip. Signal is active low.
7	CS	Chip selection pin; Low enable, High disable.
8	GND	Power Ground
9	NC	No Connect
10	VDD	Power Supply for Analog, VDD=2.5V~3.3V.
11	LEDK	LED Cathode
12	LEDA	LED Anode
13	GND	Power Ground


LUMMAX ELECTRONICS CO.,LIMITED

7.2 电路图

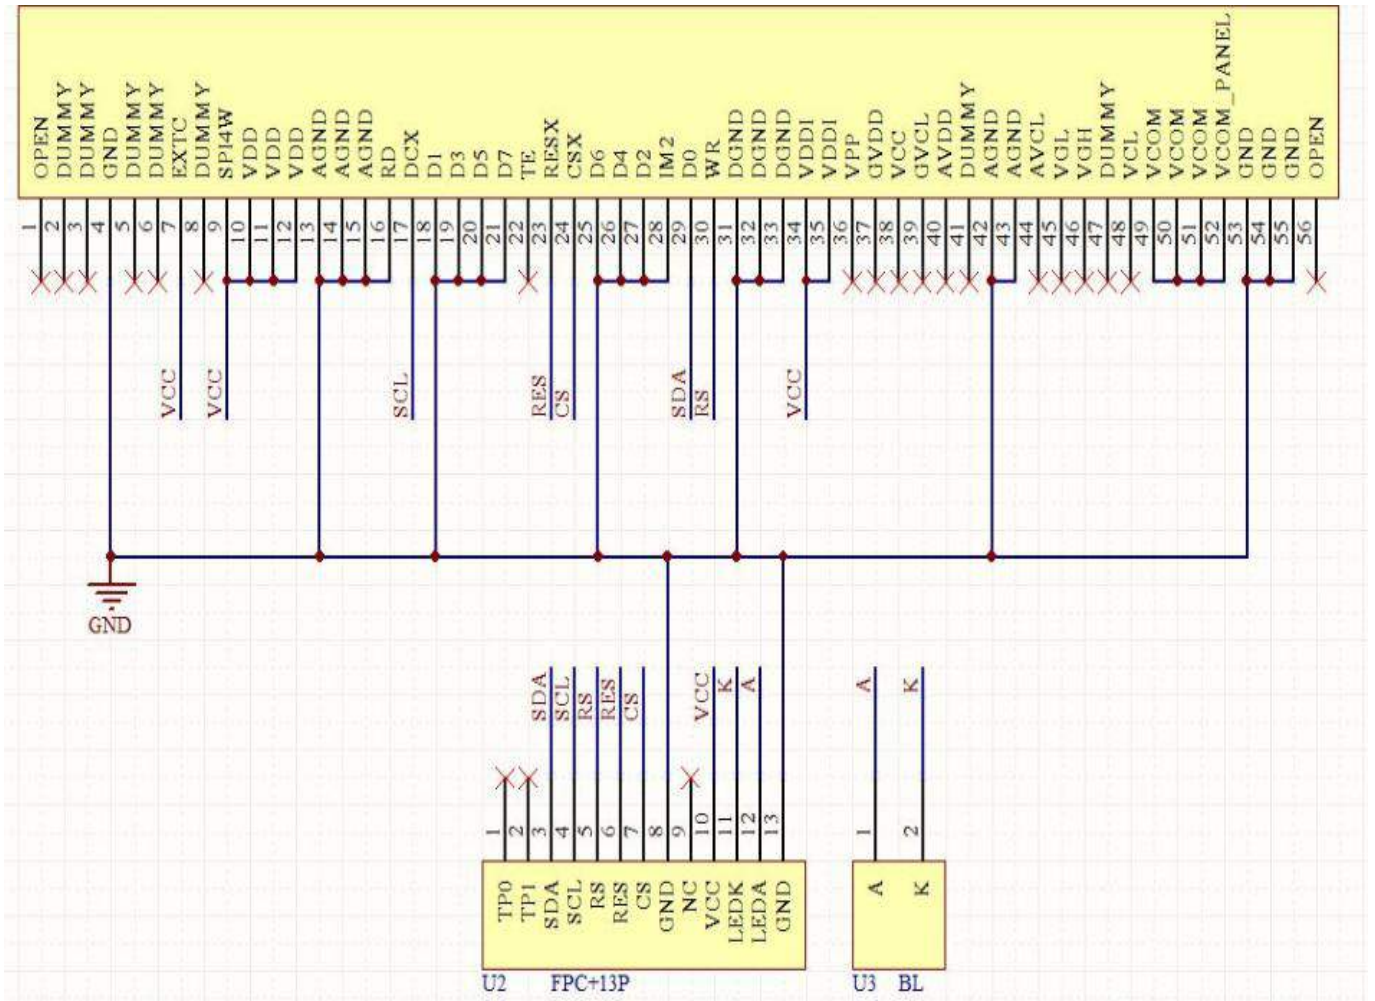

LUMMAX ELECTRONICS CO., LIMITED

8. DSI TIMING CHARACTERIST (时序特征)

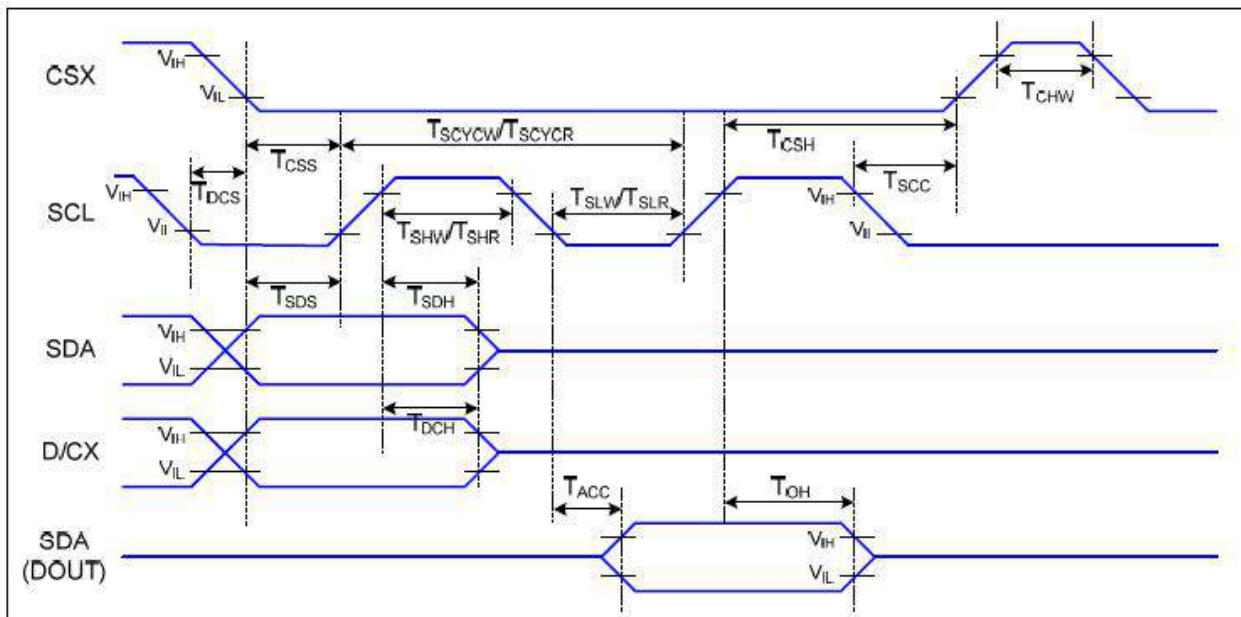

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
CSX	TCSS	Chip select setup time (write)	15		ns	
	TCSH	Chip select hold time (write)	15		ns	
	TCSS	Chip select setup time (read)	60		ns	
	TSCC	Chip select hold time (read)	65		ns	
	TCHW	Chip select "H" pulse width	40		ns	
SCL	TSCYCW	Serial clock cycle (Write)	66		ns	-write command & data ram
	TSHW	SCL "H" pulse width (Write)	30		ns	
	TSLW	SCL "L" pulse width (Write)	30		ns	
	TSCYCR	Serial clock cycle (Read)	150		ns	-read command & data ram
	TSHR	SCL "H" pulse width (Read)	60		ns	
	TSLR	SCL "L" pulse width (Read)	60		ns	
D/CX	TDCS	D/CX setup time		0	ns	
	TDCH	D/CX hold time	10		ns	
SDA (DIN) (DOUT)	TSDS	Data setup time	10		ns	For maximum CL=30pF For minimum CL=8pF
	TS DH	Data hold time	10		ns	
	TACC	Access time	10	50	ns	
	TOH	Output disable time		50	ns	

LUMMAX ELECTRONICS CO.,LIMITED

9. RELIABILITY TEST CONDITIONS(可靠性实验条件)

NO. 序号	Test Item 实验项目	Test Condition 实验条件	Inspection after test 判定标准
1	High Temperature Storage 高温存放	80±2°C,96 hours	Inspection after 2~4 hours storage at room temperature, the sample shall be free from defects. (试验结束后须正常室温存放2~4个小时之后才能测试判定,不允许有以下缺陷) 1. Air bubble in the LCD (模块中有气泡); 2. Seal leak (漏液); 3. Non-display (不显示); 4. Missing segments(漏笔); 5. Glass crack (玻璃破碎); 6. Current IDD is twice higher than initial value (电流 Idd 大于初时值的2倍); 7. The surface damage (表面损伤); 8. Do not meet the electrical characteristics (不满足模块电气性能);
2	Low Temperature Storage 低温存放	-30±2°C,96 hours	
3	High Temperature Operating 高温操作	70±2°C,96 hours	
4	Low Temperature Operating 低温操作	-20±2°C,96 hours	
5	Damp proof Test Storage 高温高湿存放	60±2°C,90%RH,96 hours	
6	Temperature Cycle Storage 冷热循环存放	-30±2°C(30min) ~ 25°C(5min) ~ 80±2°C(30min), 10Cycle.	
7	Vibration Test 振荡试验	Frequency(频率):10HZ-55Hz , Amplitude(振幅):1.5mm , x,y,z every direction for 1 hour (Packing condition) (包装状态, x,y,z 每个方向各1小时)	
8	Dropping Test 跌落试验	Drop to the ground from 1M height, one time, every side of carton (Packing condition) (包装状态, 一米高度,6面各一次)	
9	ESD Test 静电测试	C:150pf; R:330Ω; Voltage:8KV; Air discharge(空气放电),10 time	

Remark (备注):

- The samples should be applied to only on test item (每个被测试样品只能用于其中的一个测试项目);
- Sample size for each teat item is 5~10 pcs (每个测试项目的样品数量为5~10片);
- For Damp Proof Test,Pure water(Resistance>10M Ω)should be used (对于防潮试验, 试验箱的用水必须是电阻大于10M 欧姆的纯水);
- In case of malfunction defect caused by ESD damage,if it would be recovered to normal state after resetting ,it would be judged as a good part (如果由静电引起产品故障, 当放置一段时间后能够恢复正常, 则不视为产品缺陷);
- Failure Judgment Criterion:Basic Specification ,Electrical Characteristic, mechanical Characteristic, Optical Characteristic (故障判断标准: 基本规格, 电气特性, 机械特性, 光电特性).

LUMMAX ELECTRONICS CO.,LIMITED

10.INSPECTION CRITERION(检查标准)

1. Sample plan (检验方案)


Sampling plan according to GB/T2828.1-2003/ISO 2859-1:1999 and ANSI/ASQC Z1.4-1993,normal level 2 and based on: 参考国标 GB T2828.1-2003 等, 2 级检验水准。
Major defect (重缺陷) : AQL 0.4
Minor defect (轻缺陷) : AQL 1.0

2. Inspection condition (检查条件)

Viewing distance for cosmetic inspection is about 30cm with bare eyes,and under an environment of 20~40W light intensity,all directions for inspecting the sample should be within 45° against perpendicular line.

目视被检产品 30cm, 在 20 至 40W 的日光灯环境下, 检视角为 LCD 平面法线±45° 以内。

3. Definition of inspection zone in LCD (检查范围定义) .

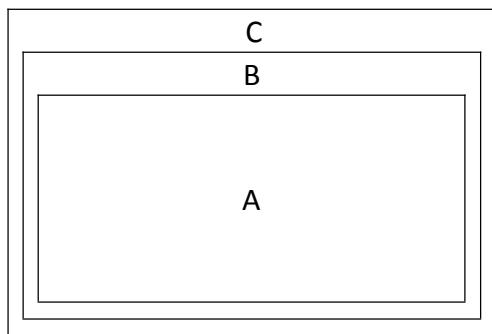

Zone A: character/Digit area 显示区域

Zone B: viewing area except Zone A (Zone A+Zone B=minimum Viewing area)

显示区域外的可视区域 (区域 A+B 等于最小可视区域)

Zone C: outside viewing area(invisible area after assembly in customer's product)

非可视区, 客户装机后不能观察到的区域

Note: As a general rule ,visual defects in Zone C are permissible, when it is no trouble for quality and assembly of customer's product.

一般情况下, 非可视区的外观缺陷在不影响质量和客户装机时是允许的。





LUMMAX ELECTRONICS CO.,LIMITED

4. Inspection Standard (检查标准)



4.1 Major Defect (重缺陷)

NO. 序号	Items to be inspected 检查项目	Inspection Standard 检查标准	Classification of defects 缺陷级别
4.1.1	All functional defects 全部功能缺陷	1. no display 不显示 2. Display abnormally 显示异常 3. Missing vertical, horizontal segment 缺线 4. Short circuit 短路 5. Back-light no lighting, flickering and abnormal lighting 背光不亮、闪动、异显 6. Touch panel no function 触摸屏无功能	Major defect (重缺陷)
4.1.2	Missing 掉落	Missing component 零件掉落	
4.1.3	Outline dimension 外形尺寸	Overall outline dimension beyond the drawing is not allowed 外形尺寸超过图纸允许范围	

4.2 Cosmetic Defect (外观缺陷)

NO. 序号	Items to be inspected 检查项目	Inspection Standard 检查标准	Classification of defects 缺陷级别																							
4.2.1	Clear Spots 明显点 Black and white Spot defect pinhole, Foreign Particle, Dirt under polarizer or TP 黑白点, 针孔, 异物点, 偏光片污点, TP 污点	For dark/white spot, size Φ is defined as $\Phi=(x+y)/2$. 	Minor defect (轻缺陷)																							
		<table border="1"> <thead> <tr> <th rowspan="2">Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.10$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.10 < \Phi \leq 0.15$</td> <td colspan="2">2</td> <td rowspan="3">Ignore 忽略不计</td> </tr> <tr> <td>$0.15 < \Phi \leq 0.2$</td> <td colspan="2">1</td> </tr> <tr> <td>$\Phi > 0.2$</td> <td colspan="2">0</td> </tr> </tbody> </table>		Size(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.10$	Ignore			$0.10 < \Phi \leq 0.15$	2		Ignore 忽略不计	$0.15 < \Phi \leq 0.2$	1		$\Phi > 0.2$	0			
		Size(mm)			Acceptable Qty																					
				A	B	C																				
		$\Phi \leq 0.10$		Ignore																						
$0.10 < \Phi \leq 0.15$	2		Ignore 忽略不计																							
$0.15 < \Phi \leq 0.2$	1																									
$\Phi > 0.2$	0																									
1. Regular 规则 $S \leq 5\text{mm}$ 允许 1 个 	When makes the text distortion or linear deformation, are not allowed. 当使文字失真或直线变形时均不允许	Minor defect (轻缺陷)																								
2. Irregular 不规则 $S \leq 1/6$ TP area 允许 1 个 																										
4.2.3	Line defect 线缺陷 Black line, White line, Foreign material under polarizer 黑白线, 偏光片异物	Defined: L line length; W line width 	Minor defect (轻缺陷)																							
		<table border="1"> <thead> <tr> <th colspan="2">Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>Width</th> <th>Length</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.02$</td> <td>Ignore</td> <td colspan="2">Ignore</td> <td rowspan="4">Ignore 忽略不计</td> </tr> <tr> <td>$0.01 < W \leq 0.05$</td> <td>$2 < L \leq 4.0$</td> <td colspan="2">$N \leq 2$ (点距 $\geq 10\text{mm}$)</td> </tr> <tr> <td>$0.01 < W \leq 0.05$</td> <td>$2 < L \leq 4.0$</td> <td colspan="2">$N \leq 1$</td> </tr> </tbody> </table>		Size(mm)		Acceptable Qty			Width	Length	A	B	C	$W \leq 0.02$	Ignore	Ignore		Ignore 忽略不计	$0.01 < W \leq 0.05$	$2 < L \leq 4.0$	$N \leq 2$ (点距 $\geq 10\text{mm}$)		$0.01 < W \leq 0.05$	$2 < L \leq 4.0$	$N \leq 1$	
		Size(mm)		Acceptable Qty																						
		Width		Length	A	B	C																			
		$W \leq 0.02$		Ignore	Ignore		Ignore 忽略不计																			
$0.01 < W \leq 0.05$	$2 < L \leq 4.0$	$N \leq 2$ (点距 $\geq 10\text{mm}$)																								
$0.01 < W \leq 0.05$	$2 < L \leq 4.0$	$N \leq 1$																								

LUMMAX ELECTRONICS CO., LIMITED

		W≥0.05	Define as spot defect										
NO. 序号	Items to be inspected 检查项目	Inspection Standard 检查标准					Classification of defects 缺陷级别						
4.2.4	Polarize scratch 偏光片划伤	<p>If the Polarizer scratch can be seen after mobile phone cover assembling or in the operating condition, judge by the line defect of 4.2.3, (片划伤可以在客户组装后或操作状态下按 4.2.3 标准进行判定)</p> <p>If the Polarizer scratch can be seen only in non-operating condition or some special angle, judge by the following (如片划伤只能在非操作状态下或某个角度可见, 则按以下标准判定)</p>					Minor defect (轻缺陷)						
		Size(mm)		Acceptable Qty									
		Width	Length	A	B	C							
		W≤0.03	Ignore	Ignore		Ignore							
		0.03< W≤0.05	L≤3.0	1		忽略不计							
		W>0.05		依点状		计							
4.2.5	Polarize Air bubble, TP Film bubble 偏光片气泡, TP 菲林气泡 (鱼眼)	Air bubbles between glass & polarizer 玻璃与片之间					Minor defect (轻缺陷)						
		Size(mm)	Zone	Acceptable Qty									
		$\Phi \leq 0.1$		A	B	C							
		$0.1 < \Phi \leq 0.2$		Ignore		Ignore 忽略不计							
		$0.2 < \Phi \leq 0.25$		2 (点距 ≥10mm)									
		$\Phi > 0.20$		1									
$\Phi > 0.20$		0											
4.2.6	Glass defect 玻璃缺陷	<p>1. Chips on corner (崩角)</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">Y</td> <td style="text-align: center;">Z</td> </tr> <tr> <td style="text-align: center;">≤3</td> <td style="text-align: center;">≤S</td> <td style="text-align: center;">≤T</td> </tr> </table> <p style="text-align: center;">Remark: S= contact pad length; T= the thickness of glass</p> 					X	Y	Z	≤3	≤S	≤T	Minor defect (轻缺陷)
		X	Y	Z									
≤3	≤S	≤T											
<p>2. Usual surface cracks (一般边崩)</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">Y</td> <td style="text-align: center;">Z</td> </tr> <tr> <td style="text-align: center;">≤3</td> <td style="text-align: center;"><S</td> <td style="text-align: center;">Ignore</td> </tr> </table> <p style="text-align: center;">Remark: S= Inner border line of the seal; S= 玻璃内部边缘环氧框</p> 					X	Y	Z	≤3	<S	Ignore	Minor defect (轻缺陷)		
X	Y	Z											
≤3	<S	Ignore											

LUMMAX ELECTRONICS CO.,LIMITED

		<p>3. Crack (裂纹)</p>  <p>Cracks tend to break are not allowed 任何区域向内延伸的裂纹都不允许</p>	<p>Major defect (重缺陷)</p>
		<p>4. Mura</p> <p>允收标准:1:按照行业标准用 ND6%的滤光片来遮盖, 如果 ND6%能盖住看不出不良现象判定 OK,否则判断 NG</p> <p>2:MIRA 定义:在黑色画面及灰阶画面出现有显示不均及 不规则的细条纹状判断为玻璃 MURA 现象</p>	<p>Minor defect (轻缺陷)</p>

LUMMAX ELECTRONICS CO.,LIMITED

11. PRECAUTIONS FOR USING LCD MODULES(使用注意事项)


11.1 Using LCD Modules 使用

- 11.1.1 As glass is fragile, It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock by dropping it or impact. (由于玻璃是脆的, 使用过程请特别注意边缘区, 防止跌落或振动, 不能机械碰撞)。
- 11.1.2 Do not apply excessive force to the display surface or the adjoining ares since this may cause the color tone to vary. Do not touch the display with bare hands. This will stain the display area and degraded insulation between terminals(some cosmetics are determined to the polarizer) (请勿施加过大的压力于显示屏或连接部位, 否则会引起色调变化。不要裸手接触显示屏, 这将弄脏显示区和降低端子之间的绝缘能力。一些外观问题是由偏光片决定的)。
- 11.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully. Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.). Do not put or attach anything on the display area to avoid leaving marks on it. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming in to contact with room temperature air. (覆盖液晶显示模块显示平面的偏光片是软性且易被擦伤, 请小心轻拿。请勿用任何硬度大于HB铅笔芯的物品(玻璃, 镊子等)接触、撞压或摩擦裸露偏光片。不要放置或粘附物体在显示区域上以免留下痕迹。冷凝在表面和端子将会损坏或弄脏偏光片。产品在低温下测试之后, 与室温空气接触之前必须在容器内升温)
- 11.1.5 If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents: Isopropyl alcohol; Ethyl alcohol. Do not scrub hard to avoid damaging the display surface (如果显示平面受污, 可对平面吹热气且轻轻地用软性干布擦除。如果受污严重, 用含下列一种溶剂的湿布擦除: 甘油, 酒精。请勿用力擦拭以免损坏显示平面。)
- 11.1.6 Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following: Water, Ketone, Aromatic solvents. Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading. Avoid contact with oil and fats. (除以上提到的溶剂外, 其他溶剂可能会损坏偏光片, 特别要避免使用以下溶剂: 水, 丙酮, 芳烃溶剂。立即擦掉唾液或水滴, 长时间与水接触会引起变形或褪色。避免接触油和油脂)
- 11.1.7 Do not attempt to disassemble or process the LCD module. (请勿拆卸液晶显示模块)
- 11.1.8 Electro-Static Discharge Control, Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment. (由于液晶显示模块使用CMOS集成, 要特别注意静电放电问题。对CMOS器件, 要特别注意静电。为防止静电损坏, 注意保持合宜的工作环境)
- 11.1.9 Input logic voltage before apply analog high voltage such as LCD driving voltage when power on. Remove analog high voltage before logic voltage when power off the module. Input each signal after the positive/negative voltage becomes stable. (开机时, 先让逻辑电压, 再接通模拟高压, 如显示屏驱动电压。关机时, 先断开模拟高压, 再关逻辑电压。正负电源都稳定后再送控制信号。)

LUMMAX ELECTRONICS CO., LIMITED

11.1.10 In the use of connector products, the operating process of attention to turn off the power before pull off and insert action. To avoid damage to the module (在使用连接器的产品时，插接过程注意先关闭电源再进行拔插动作，避免损坏模块)


11.1.11 When use LENS ,you must be do the following things (当使用假纯平 TP 结构时，注意须按以下方法处理：LENS 的双面胶避开 RTP 的 FPC 热压位，或在热压位上加贴保护膜，避免 LENS 双面胶拉动 FPC 造成损伤而无触摸)

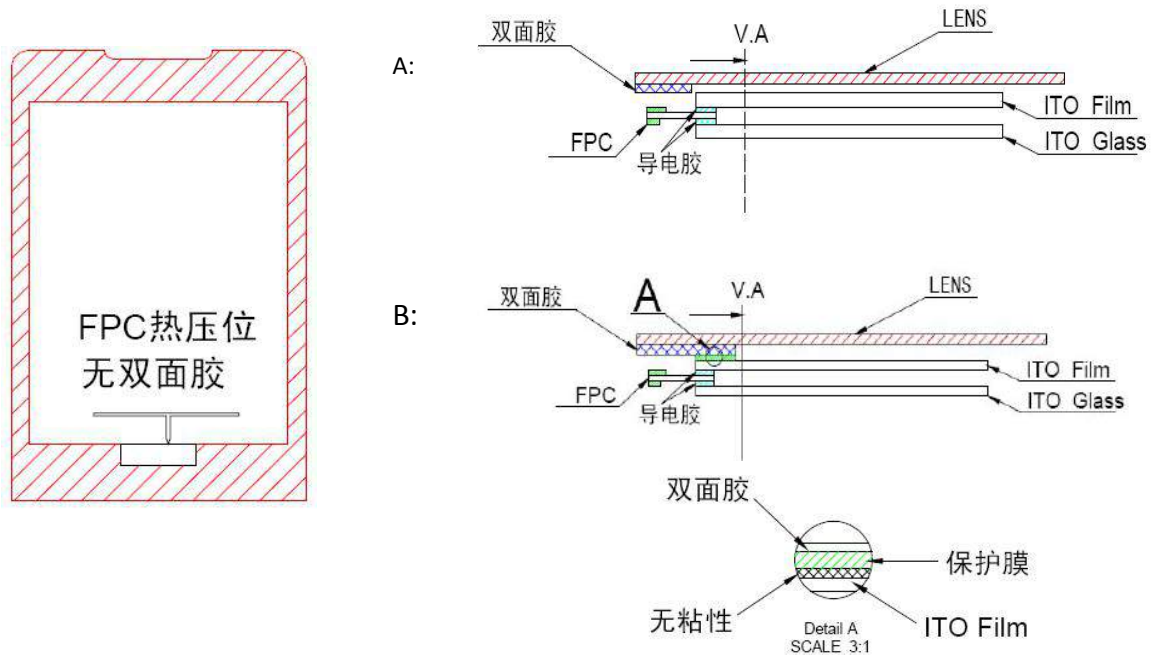

11.1.12 Precaution for assemble the module with BTB connector:

Please note the position of the male and female connector position, don't assemble or assemble like the method which the following picture shows

(用板对板连接器安装液晶显示模块注意事项： 请注意连接器的公母及连接位置，请勿出现下图所示的连接方式。)

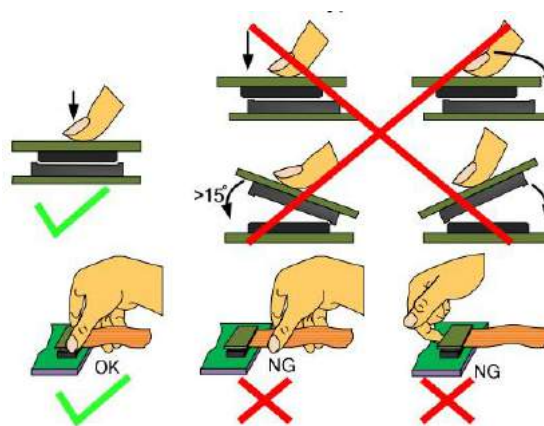

11.2 Storage Modules 储存

11.2.1 Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C, and keep the relative humidity between 40%RH and 60%RH. (避光保存，避免直接暴露在太阳光或黄光灯下，保持温度在 0~35 摄氏度之间，保持相对湿度在 40%RH 和 60%RH 之间。)

11.2.2 The polarizer surface should not come in contact with any other objects (We advise you

LUMMAX ELECTRONICS CO.,LIMITED

to store them in the anti-static electricity container in which they were shipped). (偏光片表面避免接触其他物质, 建议存放在货运防静电包装中)

11.3 Soldering

11.3.1 Iron head temperature (烙铁头实际温度): $350\pm 10^{\circ}\text{C}$, Soldering time (焊接时间): <3-4S.

Soldering don't repeat above 3 times (焊接次数勿超过 3 次)

11.3.2 If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation (This does not apply in the of a non-halogen type of flux). It is recommended that you protect the LCD surface case with a cover during soldering to prevent any damage due to flux spatters. (如果使用助焊剂, 完成焊接后一定要清除剩余的助焊剂 (除非卤化物助焊剂)。建议焊接时用盖子保护显示屏面以避免因焊剂油溅出造成的任何损坏。)

12. PRIOR CONSULT MATTER (提前商议事项)

12.1 For standard products, we keep the right to change material, process ... for improving the product property without prior notice to our customer.

(对于标准模块产品, 我们保留在不通知客户的情况下, 为提高产品性能而改变原材料及加工方法等的权利。)

12.2 For OEM products, if any changes are needed which may affect the product property, we will consult with our customer in advance.

(对于 OEM 产品, 如果需要做任何会影响到产品性能的改变, 我们会提前和客户商议。)

12.3 If you have special requirement about reliability condition, please let us know before you start the design on our samples.

(如对可靠性条件有特殊要求, 请在模块设计开发前通知我们。)