



VIEWING DIRECTION

背光上面扩散膜和挡光膜要求白色

背光四周侧面挡光膜要求镜面色

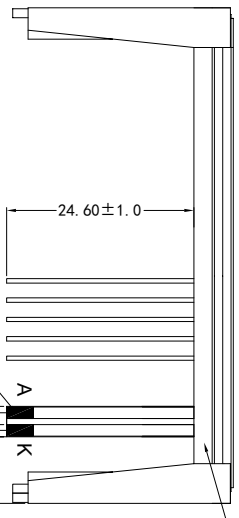

CIRCUIT DIAGRAM

PIN	SYMBOL
1	SDA
2	SCL
3	VDD
4	VSS
5	NC

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:
DESIGN BY:	WZQ	DATE:	2021.11.19	HHG88128-750		1 OF 1
CHECKED BY:		DO NOT SCALE THIS DRAWING.				DATE:
						2021.11.1

- Specifications:
1. Display Mode: HTN/positive/Transflective
 2. Viewing Angle: 6.0'clock.
 3. Drive Method: 1/4 Duty 1/3 Bias, Vop= 2.7V, Vdd= 2.7V.
 4. Top: -35°C~+70°C, Tst: -40°C~+75°C.
 5. Connector: COG+FP.
 7. Drive IC: CN91C4S96
 8. Backlight: white (6pcs LED 90mA)
 9. RoHS Compliant: Yes.
 10. With " * " Mark Dimensions Are Important Dimensions.