


INTERFACE	
1	DB0
2	DB1
3	DB2
4	DB3
5	DB4
6	DB5
7	DB6
8	DB7
9	E1
10	RW
11	RS
12	V0
13	VSS
14	VDD(5V)
15	E2
16	N.C
17	LED-A(5V)
18	LED-K

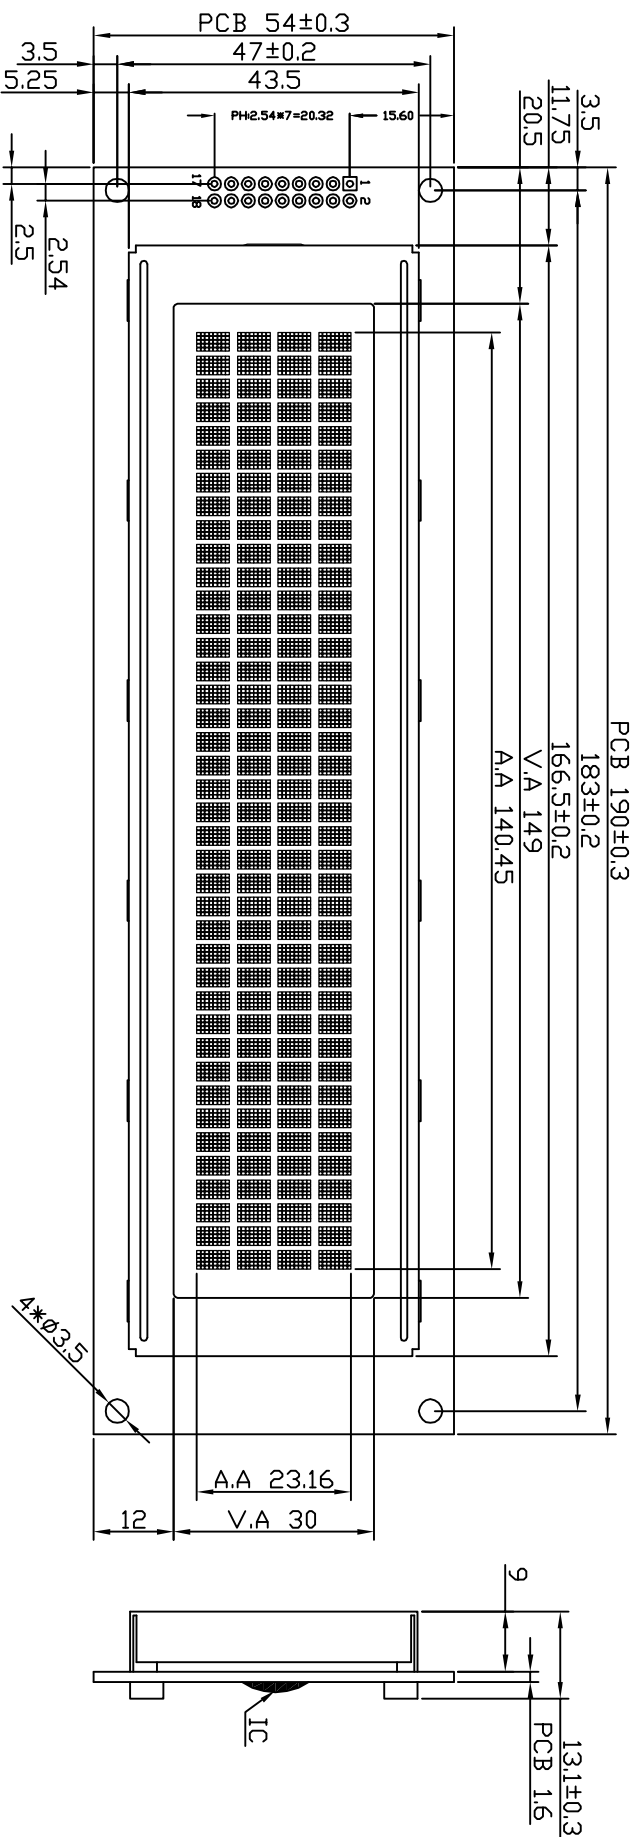

SPECIFICATION:

- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/16. BIAS:1/5. VOP=4.7V
- 3). VIEWING ANGLE: 60°CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: WHITE I=120MA
- 6). DRIVE POWER: VDD=5.0V

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-11-7

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	+0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/11/7	4004A-B		1 OF 1
CHECKED BY:				PROJECTION	DATE:
CUSTOM NO.:				DO NOT SCALE THIS DRAWING.	2011/11/7