

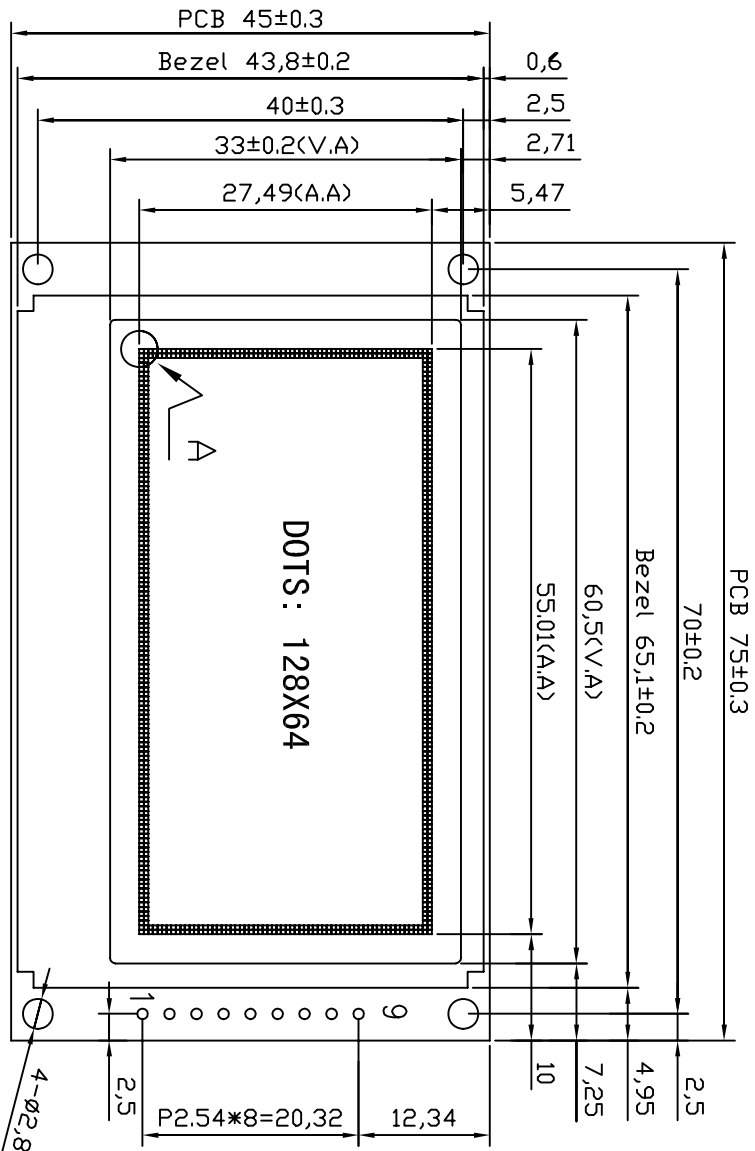


SYM	REV	DESCRIPTION	DATE
01	First issue		May-28-2013


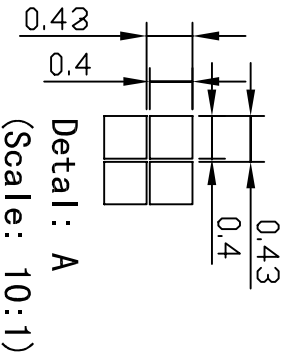


接口定义

PIN	DESC
1	CS0
2	RST
3	A0
4	SCL
5	SDA
6	VDD
7	VSS
8	BLK
9	BLA



- NOTES:**
1. Display type: FSTN/Positive
 2. Operating Voltage: VDD=3.3V, Vlcd=9V
 3. Operating temperature: -20° ~ 70°
 4. Storage temperature: -30° ~ 80°
 5. Drive mode: 1/64D, 1/9B
 6. Viewing direction: 6:00
 7. Polarizer type: Transflective
 8. Connector: ST7565R/C0G
 9. Backlight: White LED, 3.3V, 45mA

TITLE:	CD	LUMMAX ELECTRONICS CO., LIMITED	
Draw:	XQC	MODEL:	HEM12864-183E
CHK:		UNIT:	mm
Appv:		SCALE:	
			
			
		DWG NO:	C-01
		GENERAL TOL:	±0.2
		SHEET NO:	1/1