


INTERFACE	
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	RST
18	VEE
19	LED-A(+5V)
20	LED-K

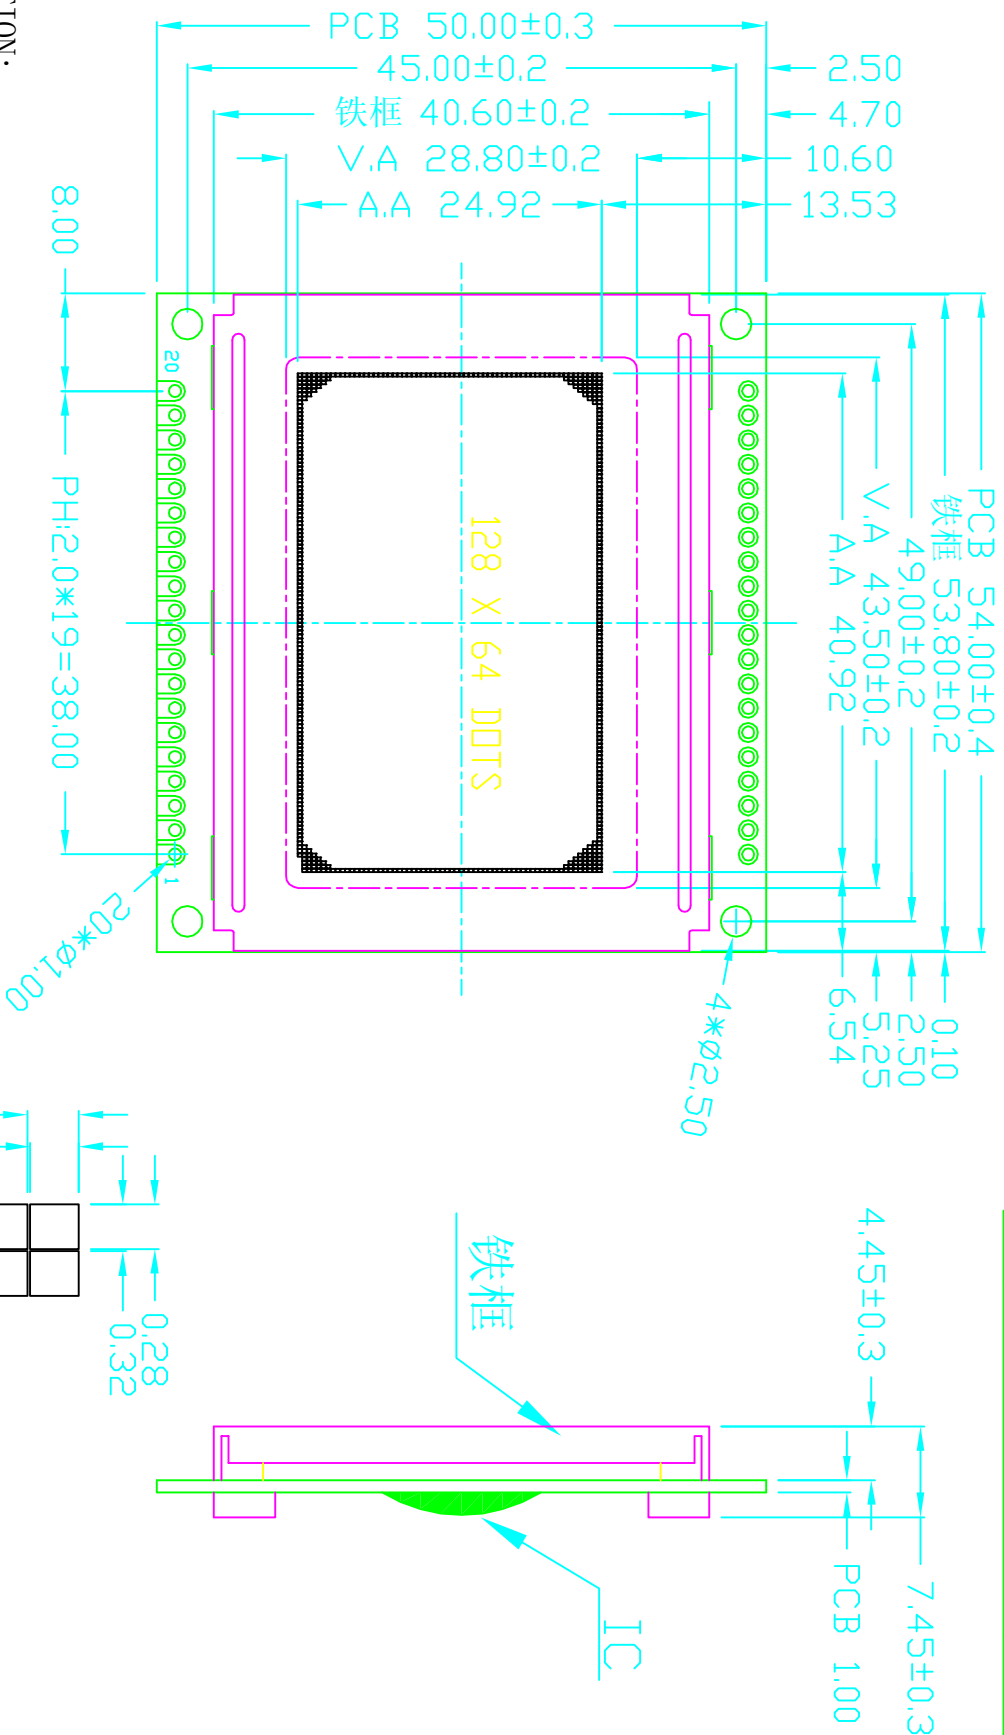

SPECIFICATION:

- 1). STN (BLUE) / NEGATIVE / TRANSMISSIVE
- 2). DUTY : 1/64. BIAS : 1/9. VOP = 8.75V
- 3). VIEWING ANGLE : 6 0' CLOCK
- 4). DRIVE VOLTAGE : 5.0V
- 5). OPERATING TEMPERATURE : -20~70°C
STORAGE TEMPERATURE : -30~80°C
- 6). BACKLIGHT : WHITE I=60MA
- 7). DRIVE IC : 0108, 0107

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-8-20

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	±0.20	UNITS : mm	DATE:	MODE NUMBER :	SHEET:
DESIGN BY:	WZC	2011/8/20	128641-B	PROJECTION	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/8/20