

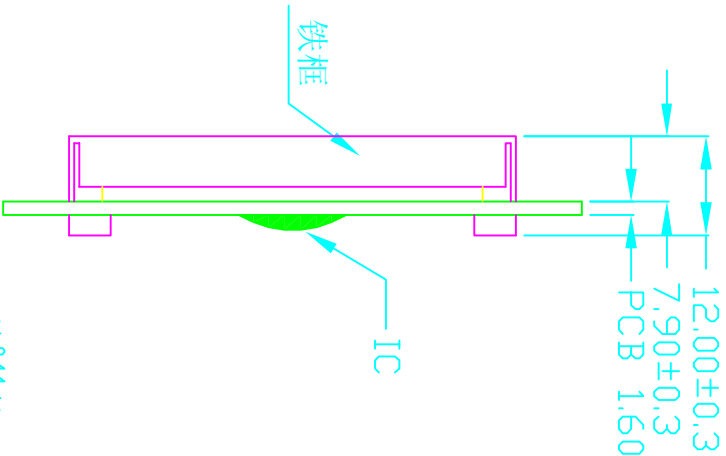


IF	SOMBLE
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	N.C
17	RST
18	VOUT
19	LED-A(5V)
20	LED-K

SPECIFICATION:

- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/32. BIAS: 1/6. VOP=5.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: ST7920

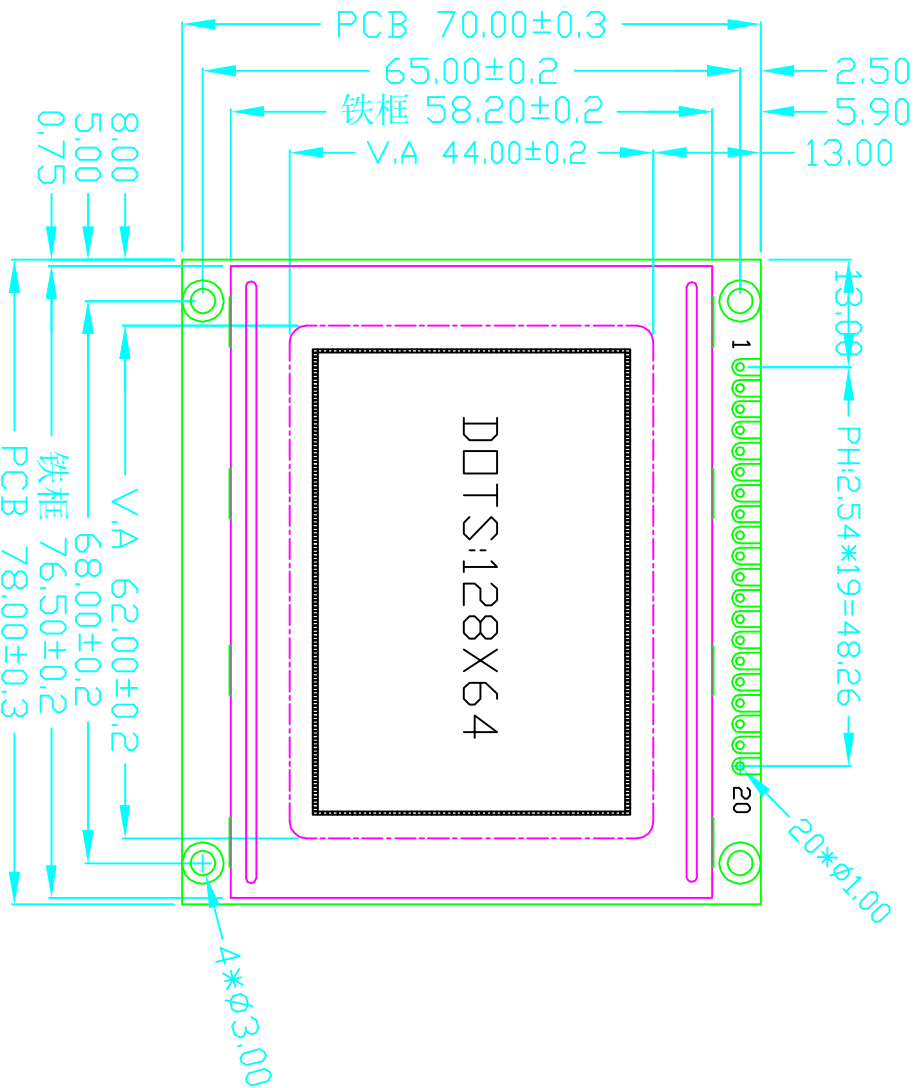

DOT SIZE:

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2010-06-17

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	+0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ		2011/6/29	12864S-B	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/6/23

DO NOT SCALE THIS DRAWING.