


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	RST
17	CS2
18	CS3
19	VOUT
20	LED-A(5V)

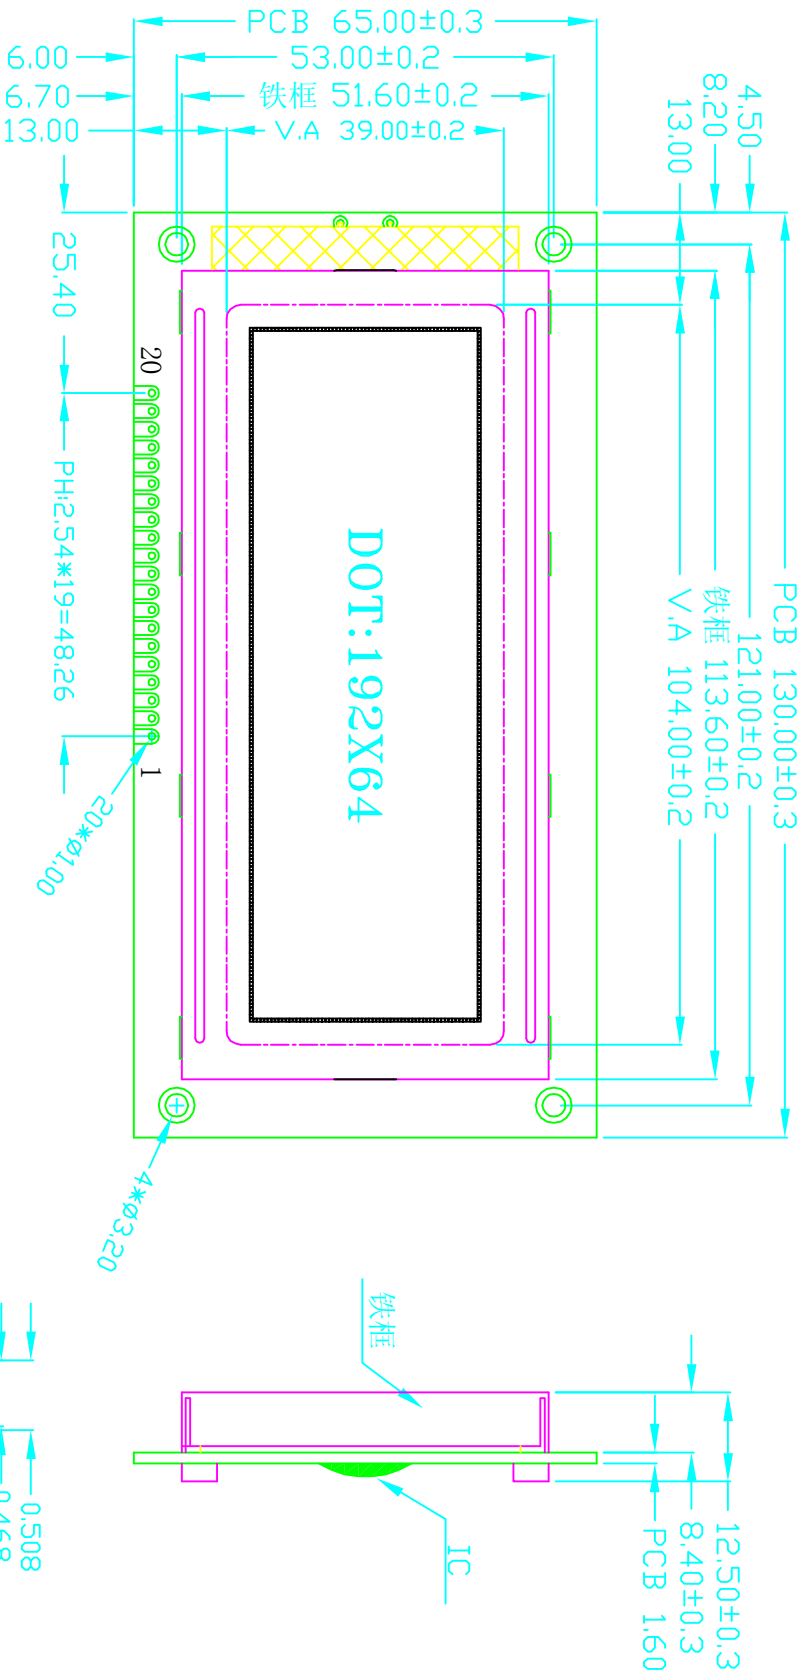

SPECIFICATION:

- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/64. BIAS:1/9. VOP=10.5V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA

VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-06-29

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance:	+0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/6/29	19264A-1-B	PROJECTION	1 OF 1
CHECKED BY:			DO NOT SCALE THIS DRAWING.	DATE:	2011/6/23
CUSTOM NO.:					