


| VER | DETAIL DESCRIPTION | DATE |
|-----|--------------------|-----------|
| 00 | FIRST ISSUE | 2013-7-10 |

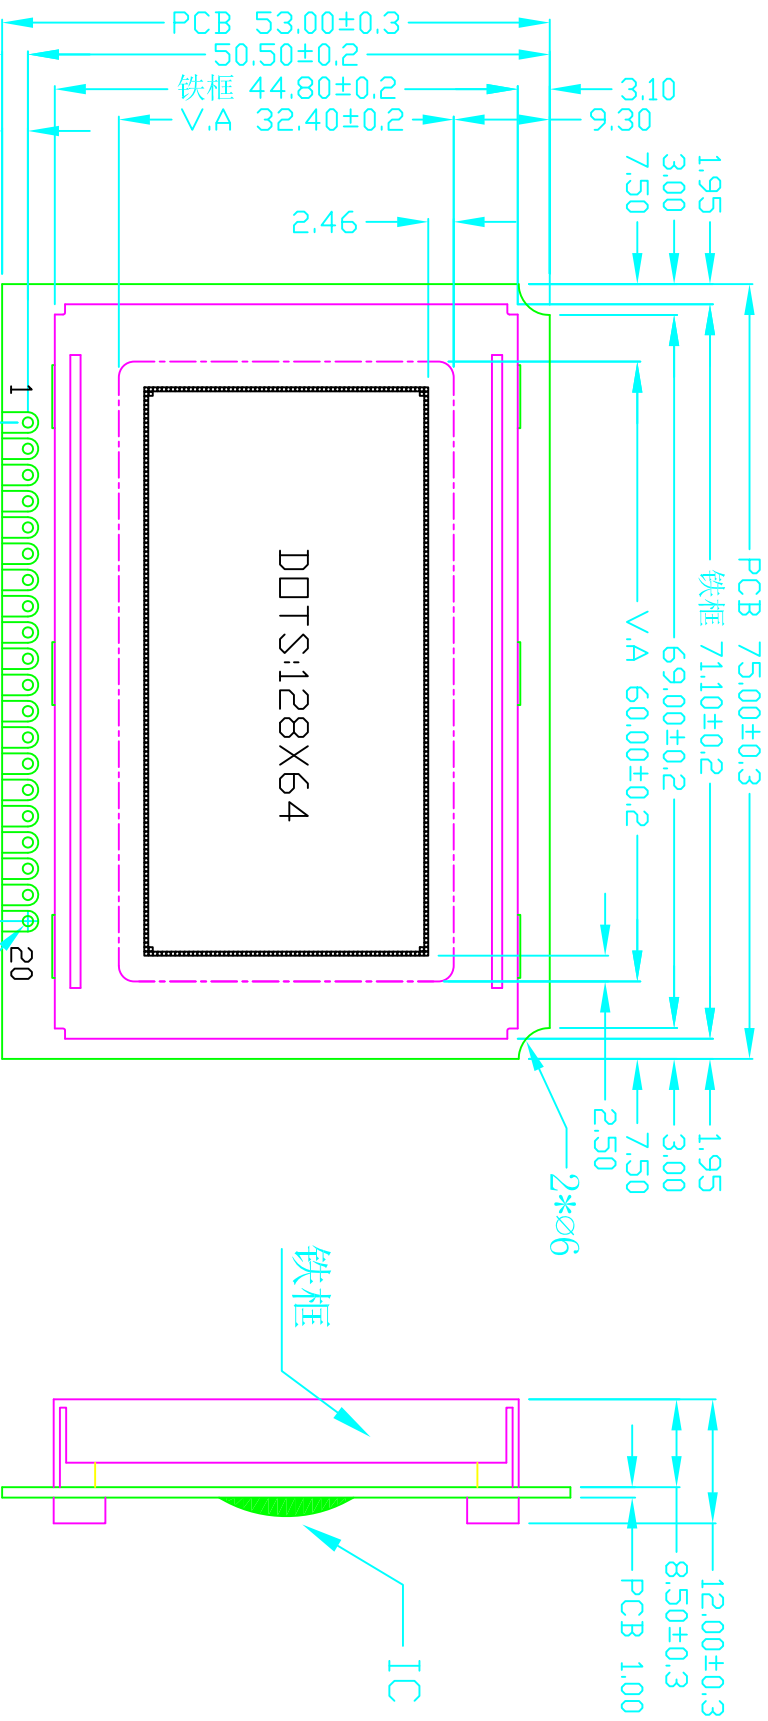

| IF | SOMBLE |
|----|-----------|
| 1 | VDD(5V) |
| 2 | VSS |
| 3 | V0 |
| 4 | DB0 |
| 5 | DB1 |
| 6 | DB2 |
| 7 | DB3 |
| 8 | DB4 |
| 9 | DB5 |
| 10 | DB6 |
| 11 | DB7 |
| 12 | CSA |
| 13 | CSB |
| 14 | RST |
| 15 | R/W |
| 16 | RS |
| 17 | E |
| 18 | VOUT |
| 19 | LED-A(5V) |
| 20 | LED-K |

由 Autodesk 教育版产品制作

SPECIFICATION:

- 1). STN (GRAY) / POSITIVE / TRANSPARENT
- 2). DUTY: 1/64, BIAS: 1/9, VOP=10.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: 0107, 0108

LUMMAX ELECTRONICS CO., LTD

| | | | | | |
|------------------------|-------|-----------|----------------------------|--------------|-----------|
| Unspecified Tolerance: | ±0.20 | UNITS: mm | DATE: | MODE NUMBER: | SHEET: |
| DESIGN BY: | WZQ | 2013/7/10 | HSM12864A-19-G | 1 OF 1 | |
| CHECKED BY: | | | DO NOT SCALE THIS DRAWING. | PROJECTION | DATE: |
| CUSTOM NO.: | | | | | 2013/7/10 |