

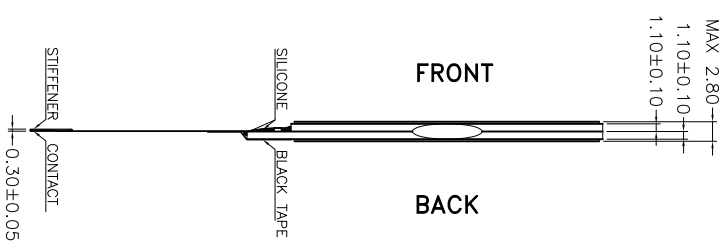
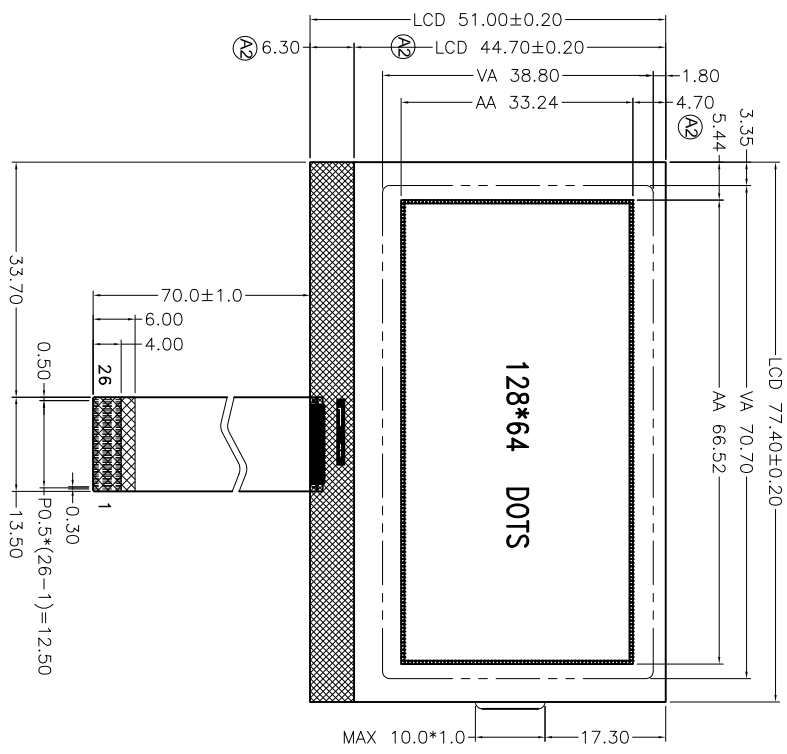


REV.	DESCRIPTION	REVISER	DATE
A0	First issue	luojinwei	2015.04.17
A1	按样品出图, 去掉背光	luojinwei	2015.05.05
A2	改AA位置和小玻璃尺寸	luojinwei	2015.05.19



PIN	SYMBOL	PIN	SYMBOL
1	/CS1	14	VDD
2	/RES	15	VSS
3	A0	16	VOUT
4	WR(R/W)	17	CAP3+
5	RD(E)	18	CAP1-
6	D0	19	CAP1+
7	D1	20	CAP2+
8	D2	21	CAP2-
9	D3	22	V4
10	D4	23	V3
11	D5	24	V2
12	D6	25	V1
13	D7	26	V0



- Specifications:
1. Display Mode: FSTN/Transflective/Positive.
  2. Viewing Angle: 6:00'clock.
  3. Drive Method: 1/64 Duty, 1/9 Bias, Vop=10.3V, Vdd=3.3V.
  4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
  5. Connector: COG+FP.C.
  6. Drive IC: ST7565P(8080 Series,C86="L")
  7. Backlight: NO
  8. With " \* " Mark Dimensions Are Important Dimensions.

# LUMMAX ELECTRONICS CO.,LTD

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION		SHEET:	1 OF 1
DESIGN BY:	luojinwei	2015.05.19	HFG12864-188-PFDN-R-A2	DO NOT SCALE THIS DRAWING.	DATE:	2015.05.19		
CHECKED BY:								