
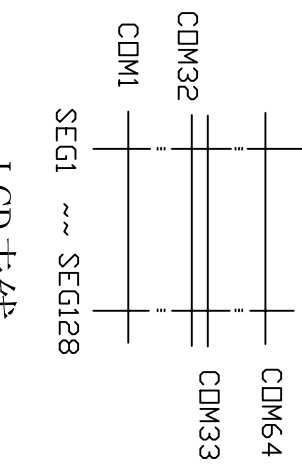


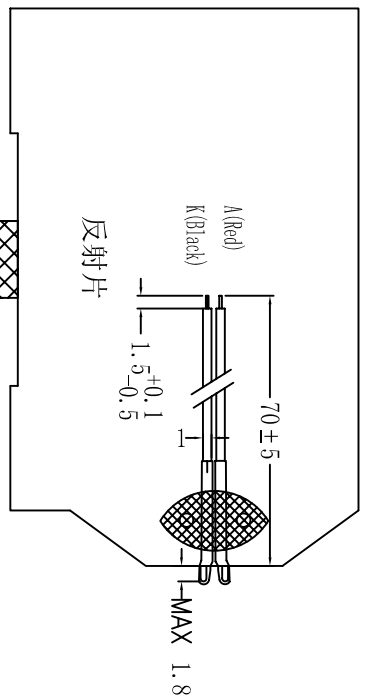


| SYM | REV         | DESCRIPTION | DATE        |
|-----|-------------|-------------|-------------|
| 01  | First issue |             | Aug-21-2012 |

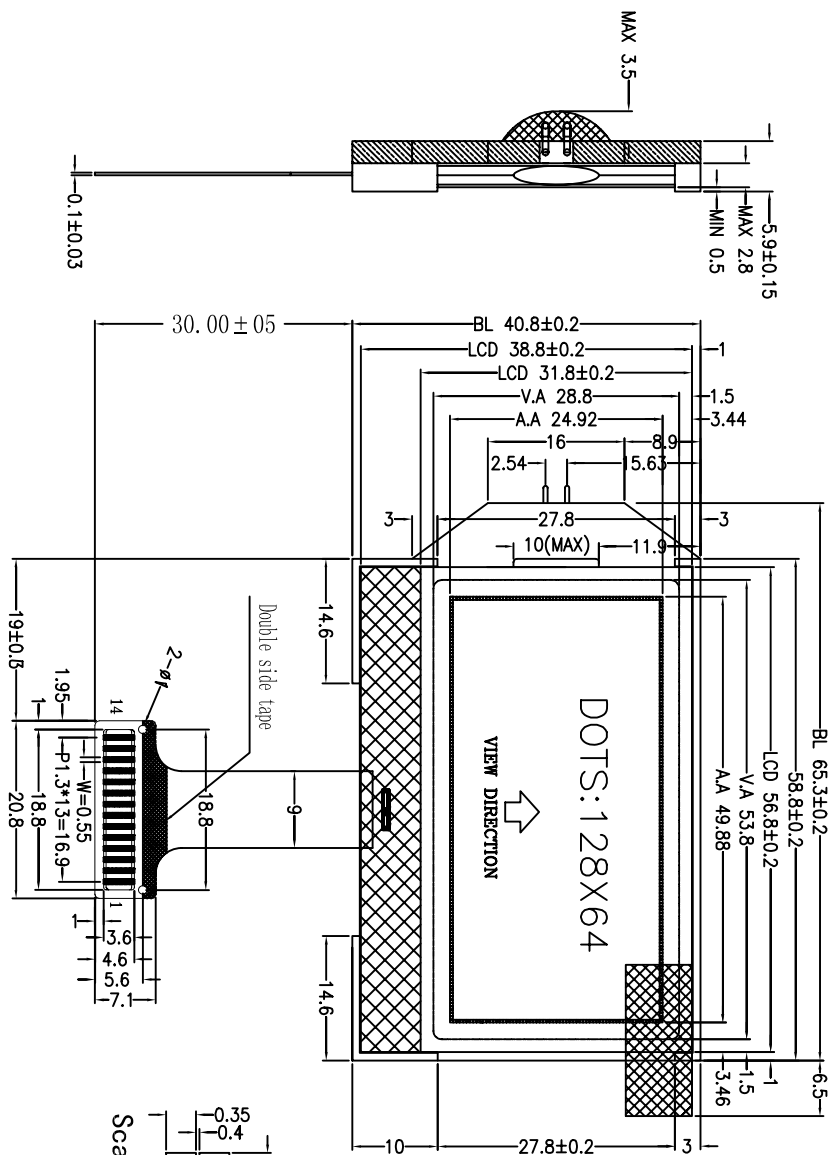

| Pin | Definition |
|-----|------------|
| 1   | /CS        |
| 2   | /RST       |
| 3   | A0         |
| 4   | NC         |
| 5   | SCL        |
| 6   | SDA        |
| 7   | VDD        |
| 8   | GND        |
| 9   | VB0+       |
| 10  | VB0-       |
| 11  | VB1-       |
| 12  | VB1+       |
| 13  | VLCD       |
| 14  | NC         |

LCD走线

- Specifications:
- Display Mode: STN, Yellow/Green Positive
  - Working Voltage: VDD=3.0V, VLCD=9.0V
  - Working Temperature: -20° C ~ 70° C
  - Storage Temperature: -30° C ~ 80° C
  - Driving Method: 1/65D, 1/9B
  - View Direction: 6:00
  - Polarizer: Transmissive
  - Driving IC: COG/UC1701
  - Backlight: IPCS White LED, 3.1V, 15 mA
  - ROHS Compliant

|        |     |              |                                 |
|--------|-----|--------------|---------------------------------|
| TITLE: | CD  |              | LUMMAX ELECTRONICS CO., LIMITED |
| Draw:  | XQC | MODEL:       | HEM1286-195                     |
| CHK:   |     | UNIT:        | mm                              |
| Appv:  |     | SCALE:       |                                 |
|        |     |              |                                 |
|        |     | DWG NO:      | C-01                            |
|        |     | GENERAL TOL: | ±0.2                            |
|        |     | SHEET NO:    | 1/1                             |