

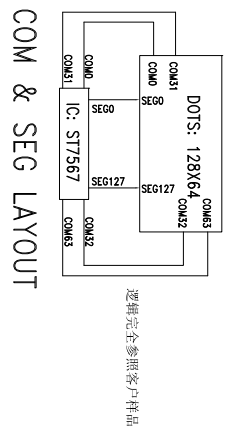
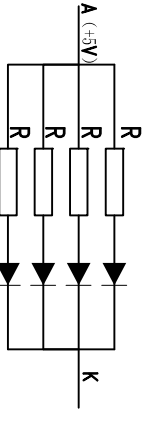


REV.	DESCRIPTION	REVISER	DATE
A0	新出图	luojinwei	2012/8/8

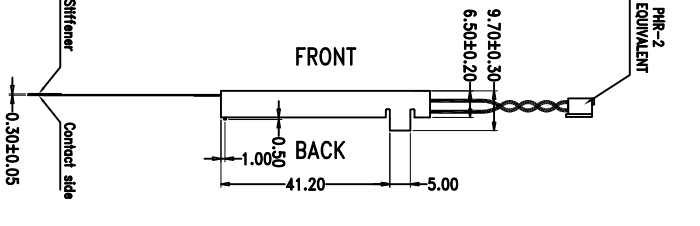

COM & SEG LAYOUT

PIN	SYMBOL	PIN	SYMBOL
1	NC	13	D6
2	/CS1	14	D7
3	/RES	15	VDD
4	A0	16	VSS
5	/WR	17	VSS
6	/RD	18	V0
7	D0	19	XV0
8	D1	20	VM
9	D2	21	VG
10	D3	22	C86
11	D4	23	P/S
12	D5	24	NC

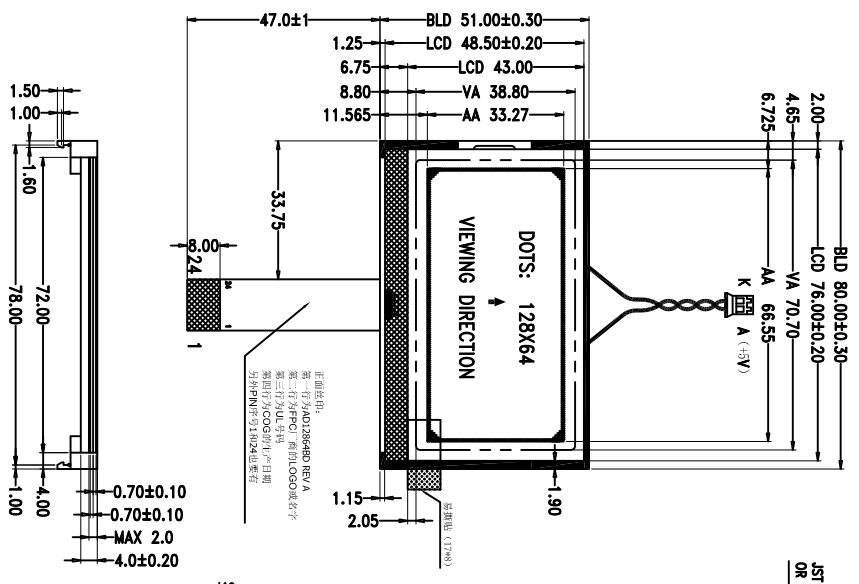

BACKLIGHT CIRCUIT

SCALE:20:1

LUMMAX ELECTRONICS CO., LTD

- Specifications:
1. Display Mode: FSTN/Black-White/Transflective/Positive.
 2. Viewing Angle: 6.0°clock.
 3. Drive Method: 1/65 Duty 1/9 Bias, Vop=8.6V, Vdd= 3.0V.
 4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
 5. Connector: COG+FPC.
 6. Backlight: 1*4 PCS WHITE LED Side Backlight; If<80mA & Vf=5.0±0.2V.
X=0.260~0.32, Y=0.260~0.32.
Luminance: >70cd/m2(Backlight Surface),Uniformity: >75%.
 7. Drive IC: ST7567
 8. RoHS Compliant: Yes.
 9. With " * " Mark Dimensions Are Important Dimensions.

UNSPECIFIED	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	DATE:
Tolerance:			2012/8/8	HFG12864-39-PFUSW-R_A0		1 Of 1	2012/8/8
DESIGN BY:		luojinwei					
CHECKED BY:							
DO NOT SCALE THIS DRAWING.							