



VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-7-11

INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

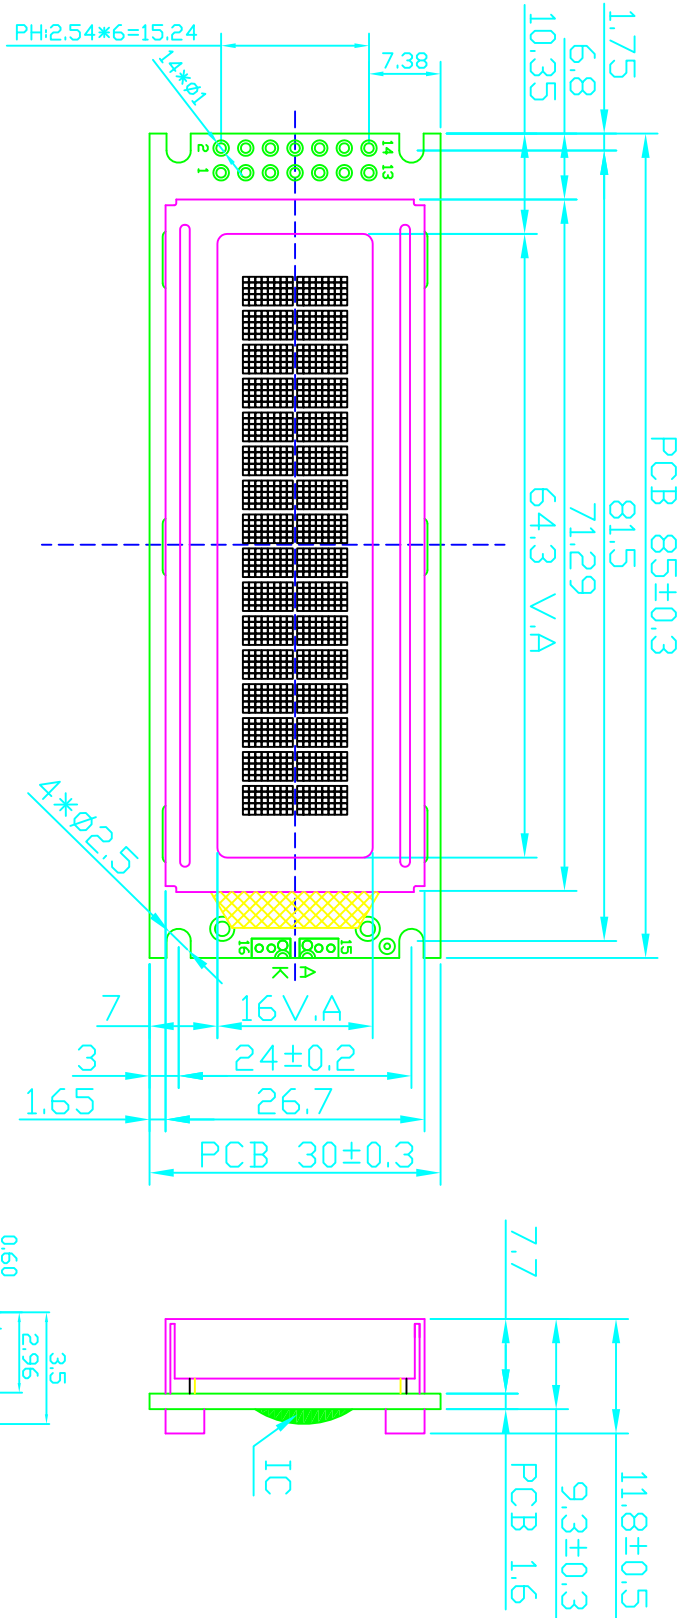

DOT SIZE:

SPECIFICATION:

- 1). STN(Y-G) / POSITIVE/TRANSFLECTIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=5.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -25~80°C
- 5). BACKLIGHT: Y-G I=20MA
- 6). DRIVE IC: SPLC780
- 7). DRIVE POWER: VDD=5.0V

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerances:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:	DATE:
DESIGN BY:	WZQ		2011/7/11	HSM1602H-Y		1 OF 1	2011/7/11
CHECKED BY:							
CUSTOM NO.:							

DO NOT SCALE THIS DRAWING.