


已册以版权平的所有图式

签名:

日期:

REV. UESURF 111111  
A0 新出图

DATE  
2012/3/6

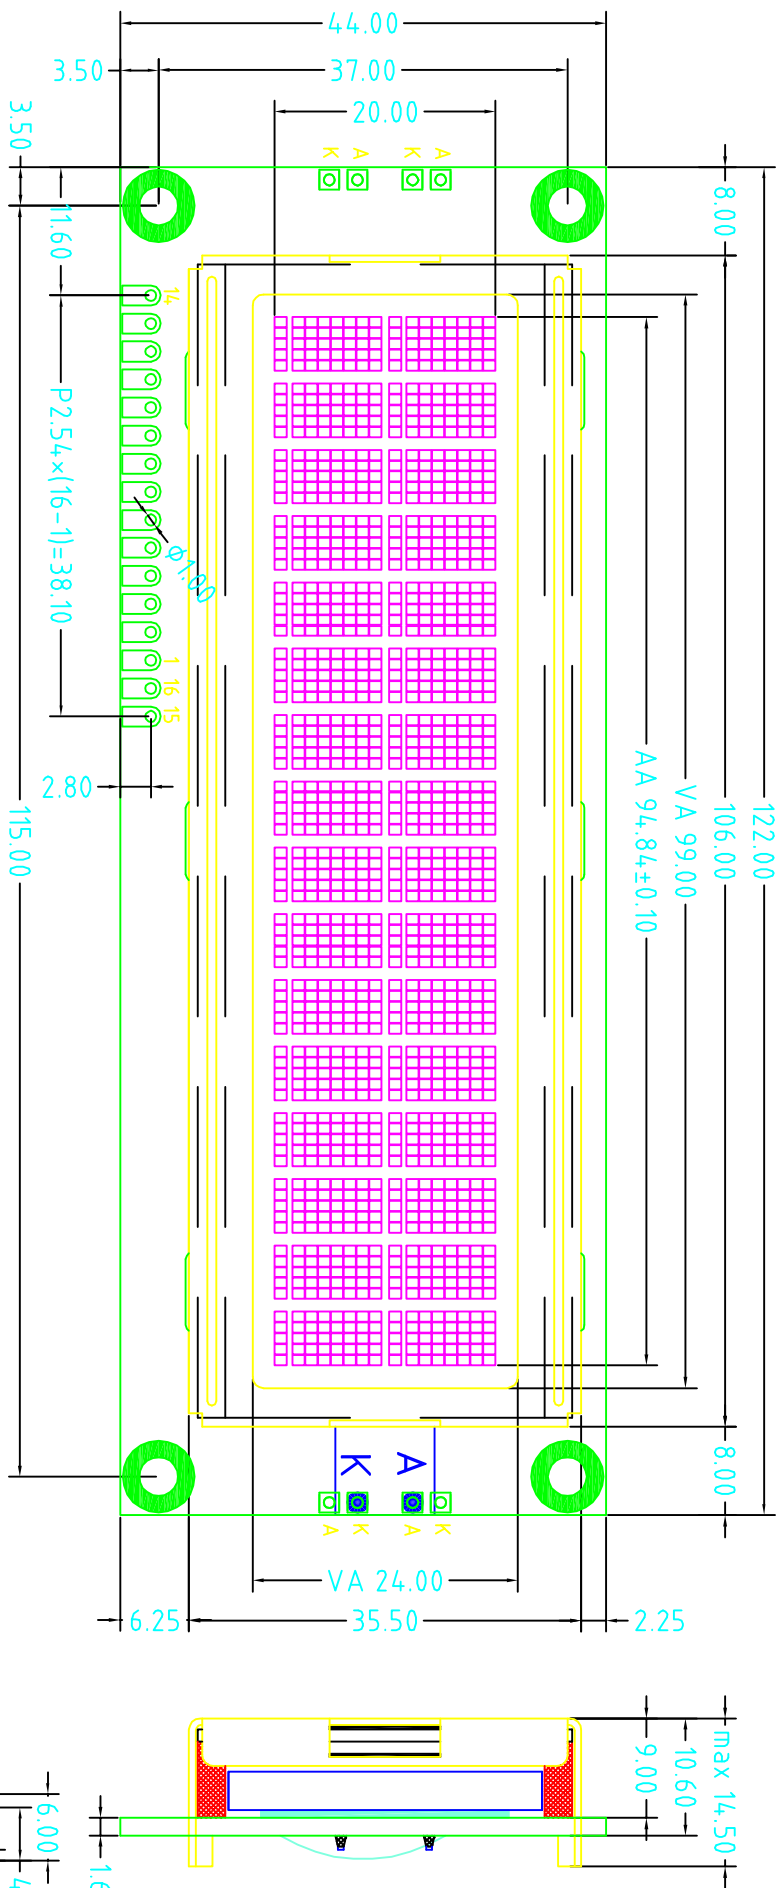

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

Notes:

1. Display Mode: STN/Yellow-Green, Transflective/Positive.
2. Viewing Direction: 6.0'clock.
3. Drive Condition: 1/16 Duty 1/5 Bias, Vop=4.5V, Vdd=5.0V.
4. Top: 0°C~+50°C, Tst: -20°C~+60°C.
5. Connector: ZEBRA.
6. Backlight: 2PCS Yellow-Green LED Side Backlight: If=30mA & Vf=3.0±0.2V. Wavelength: 570~575nm. Luminance: >80cd/m2(Backlight Surface) Uniformity: >70%.
7. Drive IC: SPL C780D1-001A, SPL C100B1

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerance: ±0.20

UNITS: mm

DATE: 2012/3/6

MODEL NUMBER: 1602B

DESIGN BY: *tanpinwei*

CHECKED BY:



SHEET: 1 OF 1

APPROVED BY:

DO NOT SCALE THIS DRAWING.

PROJECTION

DATE: 2012/3/6