

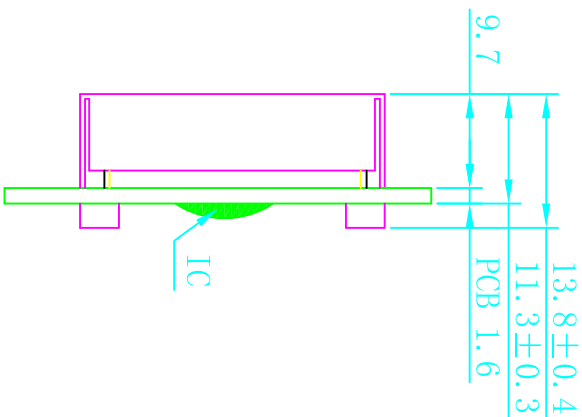


VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-7-11

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

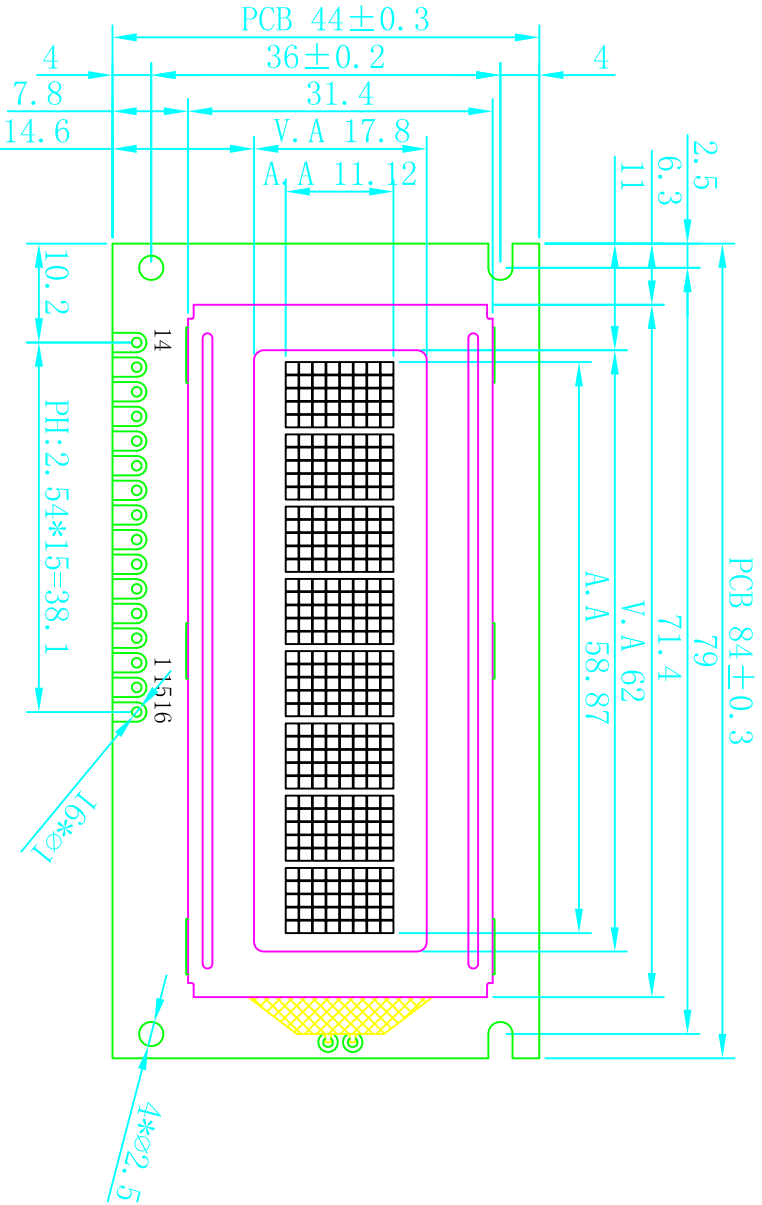

DOT SIZE:

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerances:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:
DESIGN BY:	WZQ		2011/7/11	HSM0801B		1 OF 1
CHECKED BY:						DATE:
CUSTOM NO.:						2011/7/11

DO NOT SCALE THIS DRAWING.

SPECIFICATION:

- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/8, BIAS:1/4, VOP=3.8V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: WHITE I=20MA
- 6). DRIVE IC: AIP31066
- 7). DRIVE POWER: VDD=5.0V