



SYM	REV	DESCRIPTION	DATE
	01	First issue	Oct-21-2013
	02	增加易撕贴	Aug-23-2014

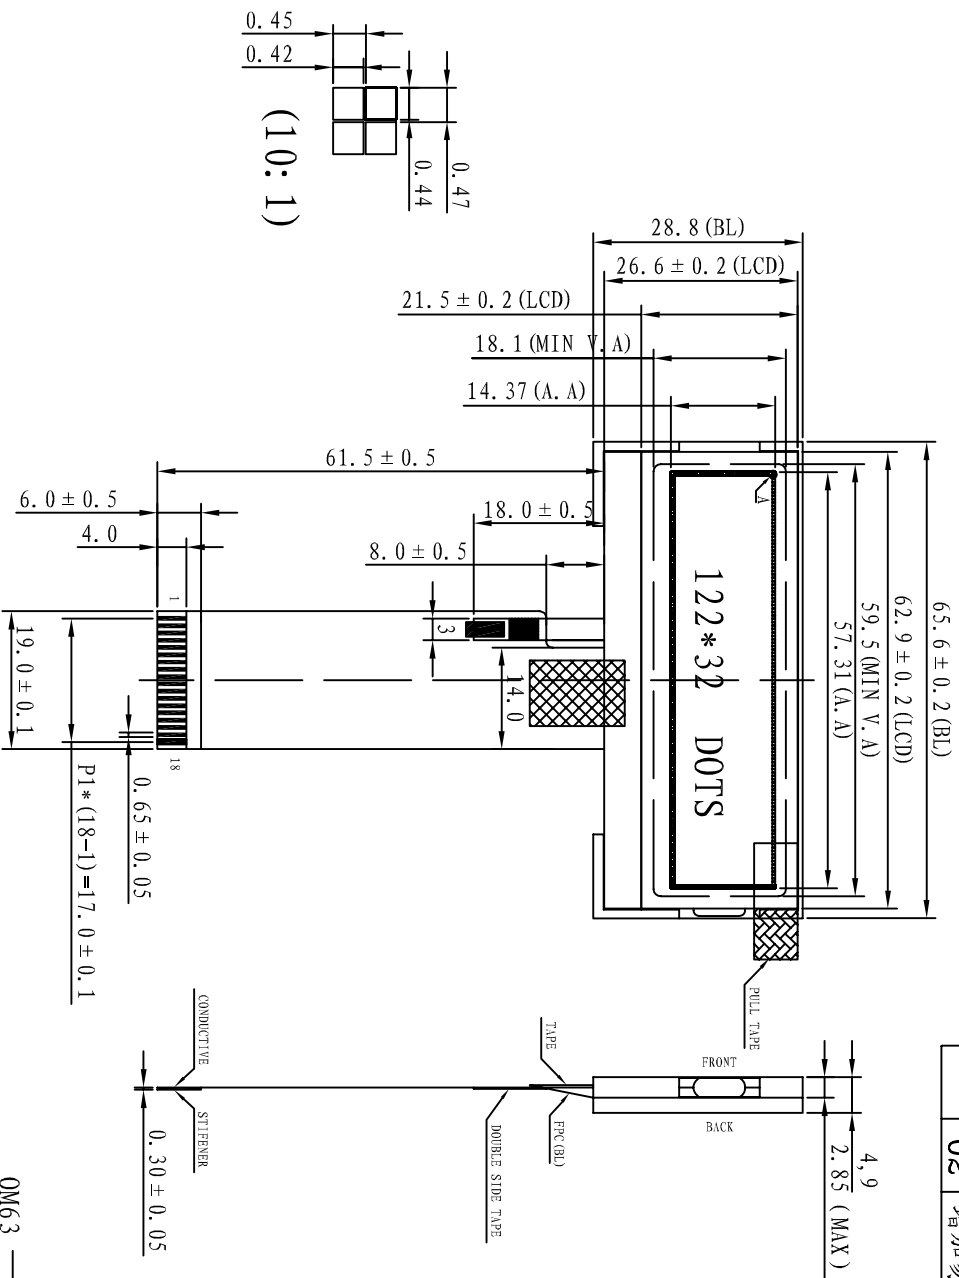

PIN	SYMBOL
1	A+
2	K-
3	NC
4	/CS1
5	RST
6	AO
7	D6(SCL)
8	D7(S1)
9	VDD
10	VSS
11	NC
12	NC
13	NC
14	NC
15	VO
16	XVO
17	VG
18	NC

NOTES:

1. DISPLAY TYPE: STN-Y/G
2. OPERATING VOLTAGE: V_{dd}=3V, V_{lcd}=7.7V
3. OPERATING TEMPERATURE: 0°C~50°C
4. STORAGE TEMPERATURE: -10°C~60°C
5. DRIVE MODE: 1/33D, 1/6B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSPARENT
8. CONNECTOR: ST7567/COG
9. ROHS: YES
10. BACKLIGHT: GREEN, 1PC LED, 2.7V, 10mA

TITLE: CD		LUMMAX ELECTRONICS CO., LIMITED	
Draw: XQC	Model: HEM12232-09	DWG NO: C-02	
Chk:	UNIT: mm	GENERAL TOL: ±0.2	
Appv:	SCALE:	SHEET NO: 1/1	